

KR Electronics

General Description


KR 2860 is a 6.2 MHz bandpass filter. The filter has a nominal 3 dB bandwidth of 1.24 MHz. Other passband frequencies are available. Please consult the factory.

Features


- 6.2 MHz Center Frequency
- 1.24 MHz nominal 3 dB Bandwidth
- SMA Connectors
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay
(1 dB/div and 200 nsec/div)

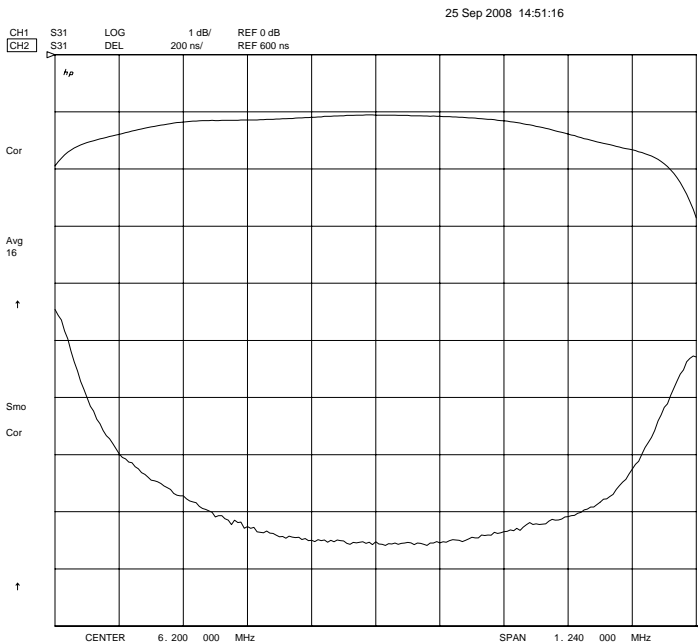

Overall Response
(10 dB/div)

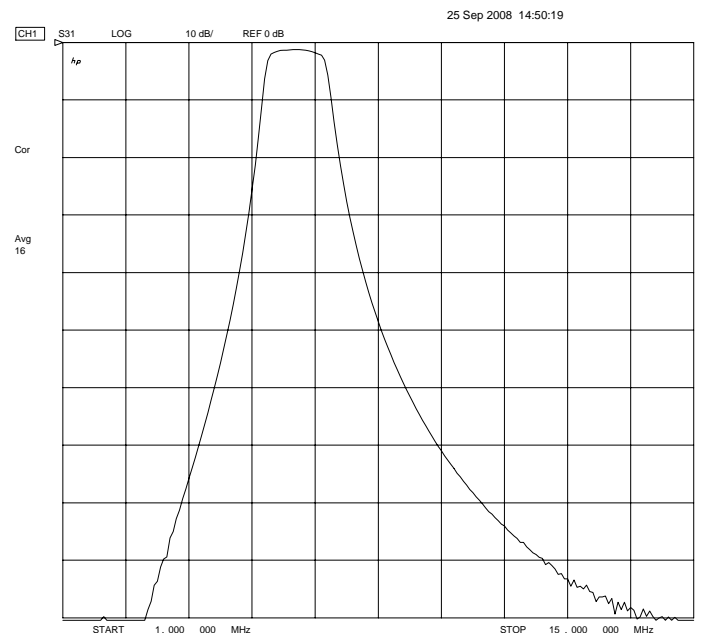

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001



Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2860

Specifications

Parameter	Specification
Filter type	Bandpass
Insertion Loss	< 3 dB (1 dB typical)
Center Frequency	6.2 MHz
3 dB Bandwidth	1.24 MHz \pm 10%
Attenuation at 12.4 MHz	> 60 dB (>80 dB typical)
Source and Load	50 Ω

Physical Dimensions

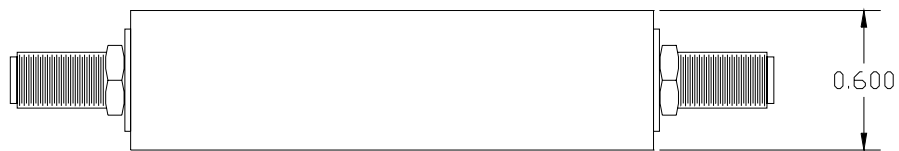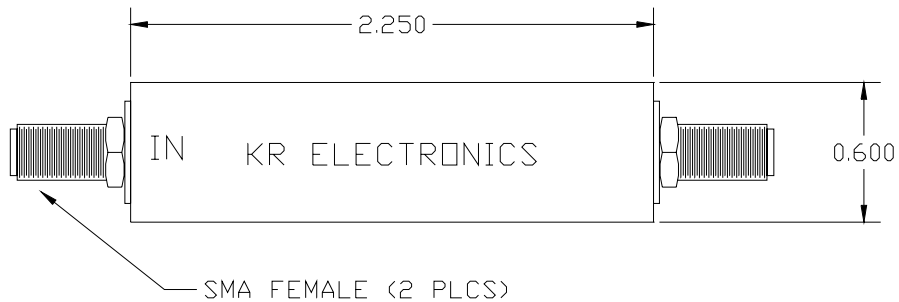

Dimensions in inches
Metal Case