


Highpass Filter

KR Model
2348


Passband Amplitude

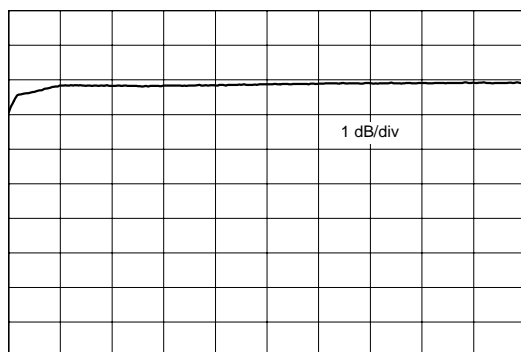

5 MHz

42 MHz

Overall Amplitude

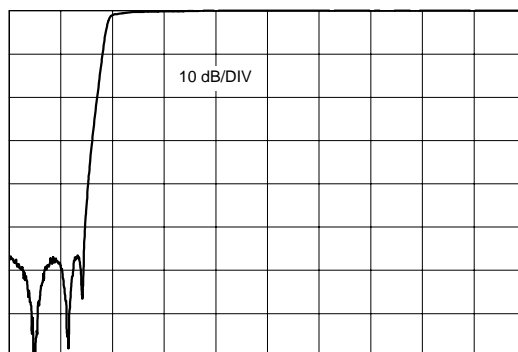


1 MHz

20 MHz

Specifications

KR Part Number	2348
Filter Type	Highpass
Insertion Loss	< 1 dB
End of Stopband >40 dB	3.73 MHz
Start of Passband < 3 dB	5.0 MHz
Source and Load Impedance	75 Ω

Outline Drawing

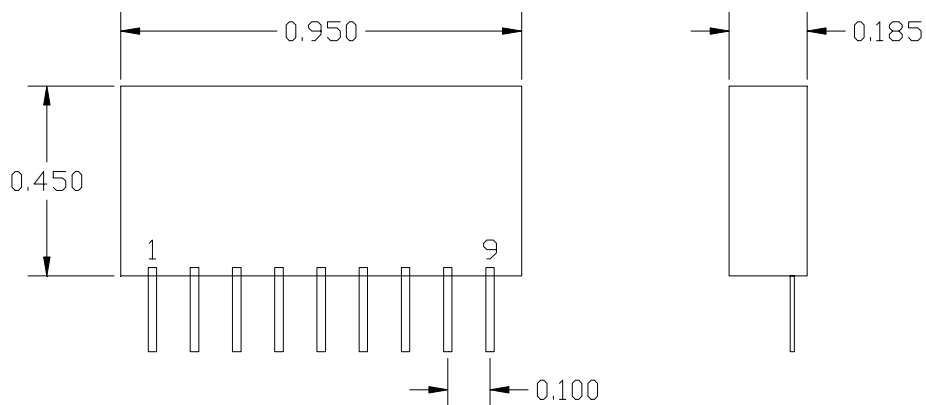

KR Electronics
www.krfilters.com
91 Avenel Street
Avenel, NJ 07001
732-636-1900

PIN 1 - INPUT
PIN 9 - OUTPUT
PIN 2 THRU 8 - GROUND
UNIT IS UNENCAPSULATED - PARTS ARE EXPOSED