



WR-284 to SMA Female Waveguide to Coax  
Adapter 2.6 GHz to 3.95 GHz

TECHNICAL DATA SHEET

PE9834

**WR-284 to SMA Female Waveguide to Coax Adapter 2.6 GHz to 3.95 GHz**

**Configuration**

Waveguide Interface	WR-284
RF Connector	SMA Female
RF Connector Impedance	50 Ohms

**Electrical Specifications**

Frequency Range, GHz	2.6 to 3.95
----------------------	-------------

**Mechanical Specifications**

**Size**

Length, in [mm]	2.46 [62.48]
Width/Dia., in [mm]	3.49 [88.65]
Height, in [mm]	2.4 [60.96]

**Waveguide Interface**

Type	WR-284
------	--------

**RF Connector**

Type	SMA Female
------	------------

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

**Plotted and Other Data**

Notes:	Values at 25 °C, sea level
--------	----------------------------

WR-284 to SMA Female Waveguide to Coax Adapter 2.6 GHz to 3.95 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-284 to SMA Female Waveguide to Coax Adapter 2.6 GHz to 3.95 GHz PE9834](http://www.pasternack.com/wr-284-sma-female-waveguide-coax-adapter-2.6-ghz-3.95-ghz-pe9834-p.aspx)

URL: <http://www.pasternack.com/wr-284-sma-female-waveguide-coax-adapter-2.6-ghz-3.95-ghz-pe9834-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.




# PE9834 CAD Drawing

WR-284 to SMA Female Waveguide to Coax Adapter 2.6 GHz to 3.95 GHz

WR284		Dimension	Inches	mm
A			0.524	13.31
B			1.338	33.99
C			2.152	54.66
U			2.966	75.34
V			3.490	88.65
D			0.660	16.76
E			1.330	33.78
F			1.990	50.55
H			3.845	97.66
J			2.344	59.54
K ( $\pm 0.004$ )			2.840	72.14
L ( $\pm 0.004$ )			1.340	34.04

M	0.250	6.35
N	2.150	54.61
O	2.093	53.16
P	1.594	40.49

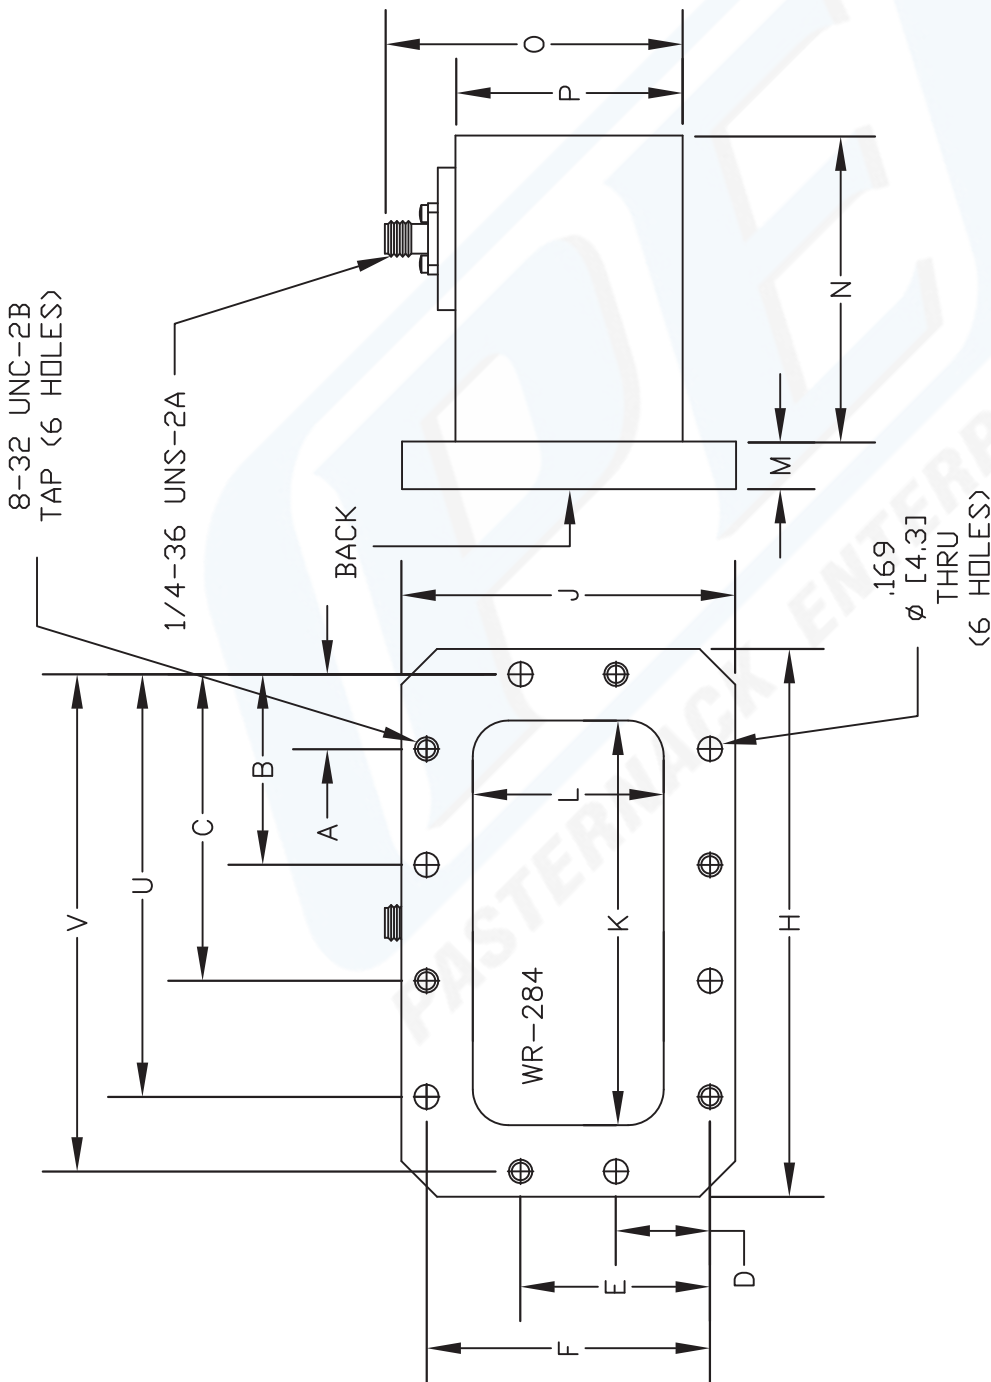

BACK VIEW

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

**PE9834**

**PASTERNAK ENTERPRISES, INC.**  
 PO BOX 16759, IRVINE, CA 92623  
 PHONE (949) 261-1920 FAX (949) 261-7451  
 WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
 E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)  
**COAXIAL & FIBER OPTICS**



REV. -

FSCM NO. 53919

CAD FILE 092107

SCALE N/A

SIZE A

127