

KR 2592 Notch Filter

General Description


KR 2592 is a 2.85 MHz notch filter. Please consult the factory for other frequencies.

Features

- Notch filter
- 2.85 MHz
- 50 Ω
- BNC connectors

Typical Performance

Overall Response (10 dB/div)

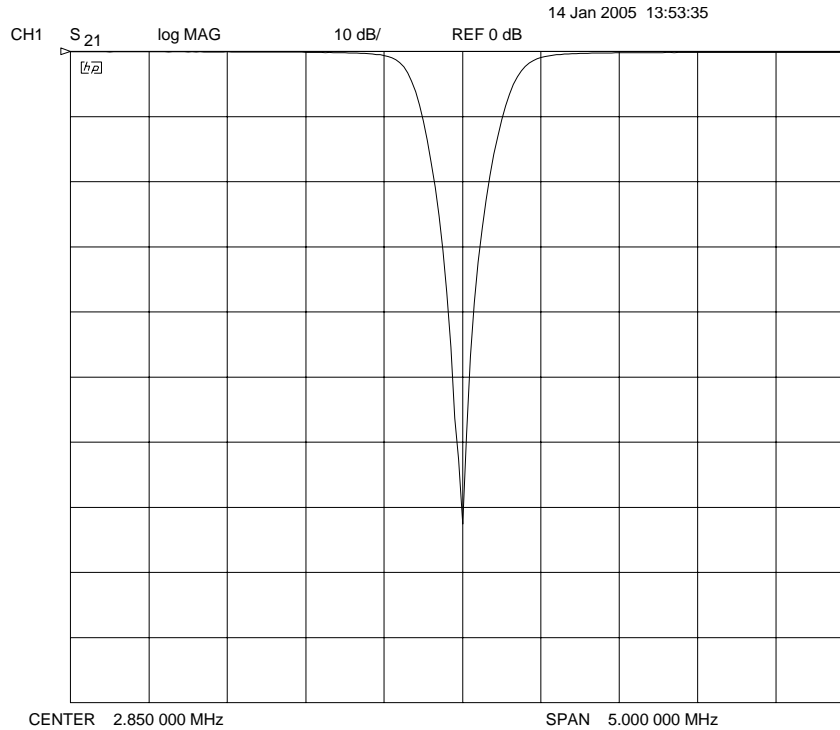

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2592

Specifications

Parameter	Specification
Filter type	Notch
Attenuation at 2.461 MHz	< 3 dB
Attenuation at 2.850 MHz	> 40 dB
Attenuation at 3.300 MHz	< 3 dB
Source & Load	50 Ω

Physical Dimensions

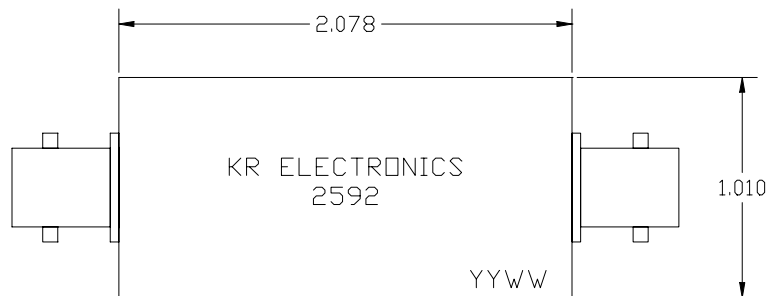

Dimensions in inches

