



# Bandpass Filter

KR Series 2157




Center Frequency can be scaled to meet your requirement

## Overall Amplitude

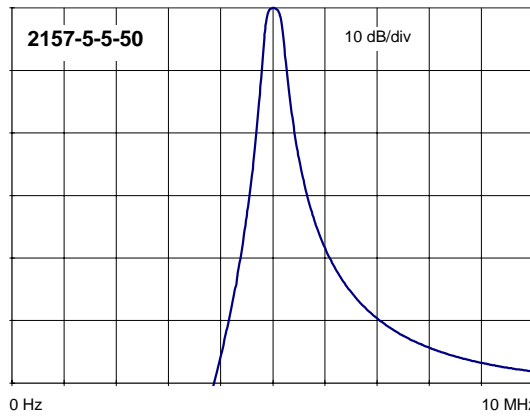

## Overall Amplitude

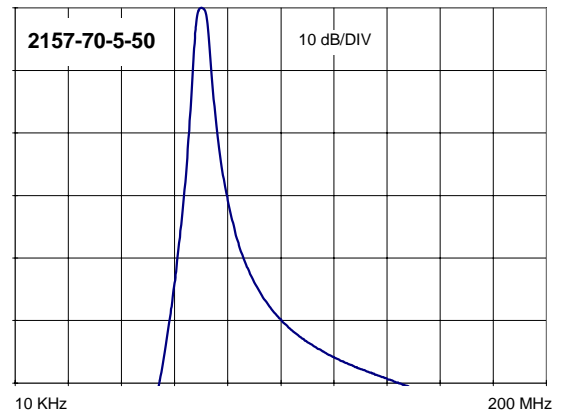


## Specifications

KR Part Number	2157-5-5-50	2157-10.7-5-50	2157-21.4-5-50	2157-70-5-50
Filter Type	Bandpass	Bandpass	Bandpass	Bandpass
Center Frequency	5 MHz	10.7 MHz	21.4 MHz	70 MHz
3 dB Bandwidth (min)	5%	5%	5%	5%
40 dB Bandwidth	2 MHz	4.28 MHz	8.56 MHz	28 MHz
Impedance	50 Ω	50 Ω	50 Ω	50 Ω


## Customized

To Specify Your Own Filter

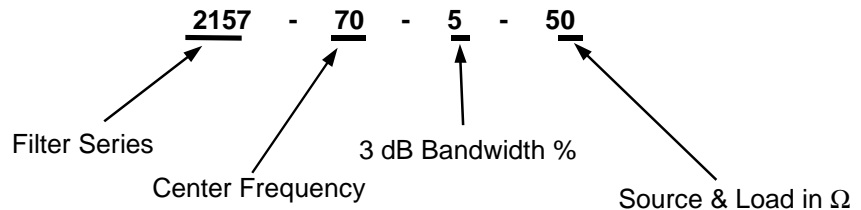

3 dB Bandwidth is expressed as a percentage of the center frequency.  
Not all combinations of Center Frequency, Bandwidth and Impedance are allowed.

## Outline Drawing

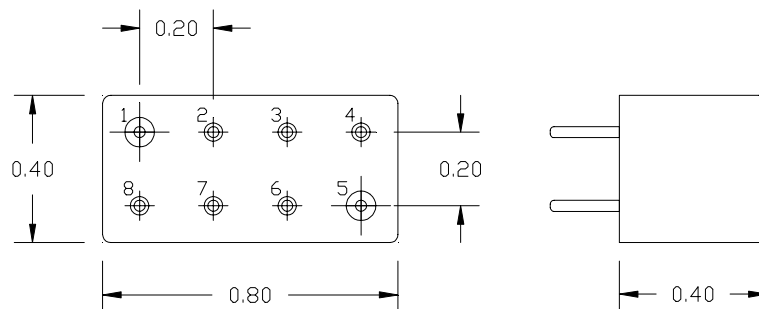

Metal Case  
Pin 1 is Input Pin 5 is Output  
All other Pins are Ground  
All leads .030" diameter  
Dimensions inches

**KR Electronics**  
91 Avenel Street  
Avenel, NJ 07001

Phone: (732) 636-1900  
Fax: (732) 636-1982