

KR Electronics, Inc.

General Description


KR Electronics part number 3052 is a 198 KHz notch filter.
Please consult the factory for other frequencies.

Features

- Notch filter
- 198 KHz Notch Frequency
- 50 Ω
- SMA Connectors

Typical Performance

Overall Response
(10 dB/div)

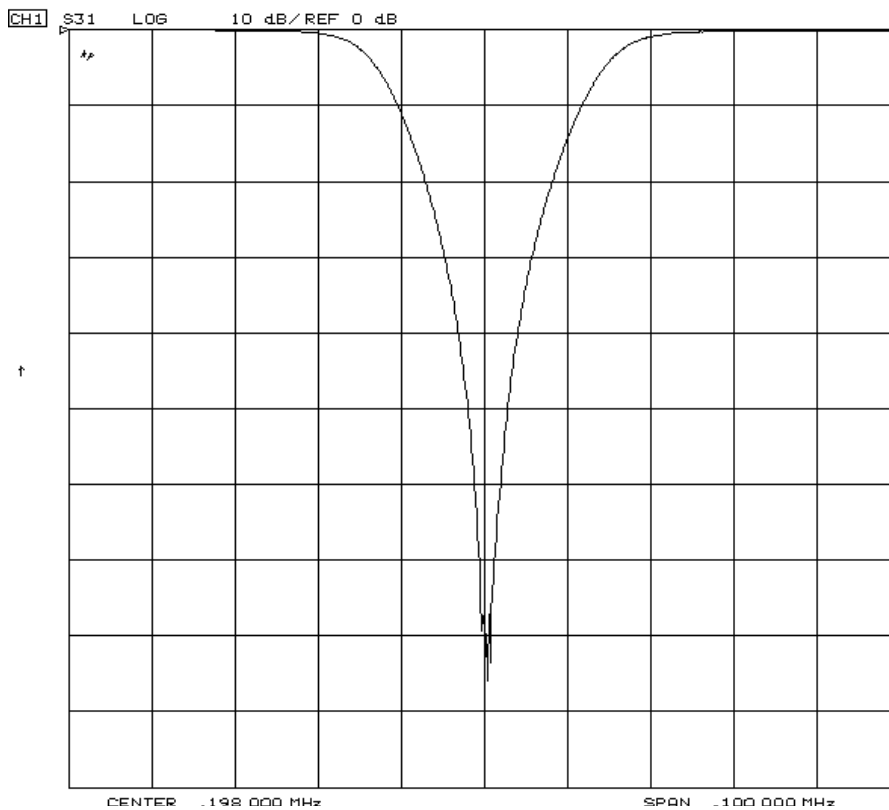

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3052

Specifications

Parameter	Specification	
Filter type	Notch	
Notch Frequency	198 KHz	
3 dB Bandwidth	38.8 KHz max	30.6 KHz typical
40 dB Bandwidth	4 KHz min	7.1 KHz typical
Source and Load	50 Ω	

Physical Dimensions

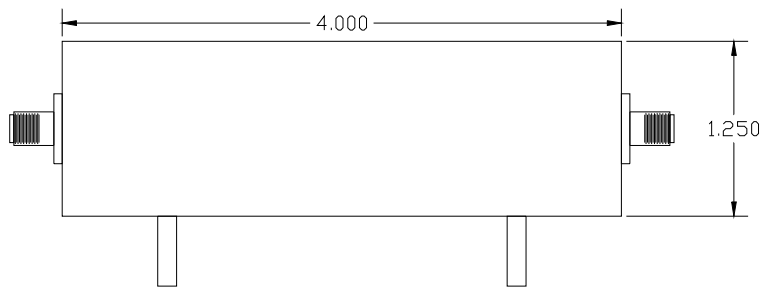

Notes:

1. Dimensions in inches
2. May be supplied in alternate case

