



4-Way Power Divider 2-8GHz



Wide Band Power Divider

Very small package

Excellent phase and amplitude balance

Bi-Directional as divider and combiner *

Low Insertion loss and high isolation

Standard: MIL E-5400, MIL E -16400

High power handling capability

* 3W/2W maximum input when work as combiner.

Electrical Specifications, $T_A = +25^\circ C$, 50 Ohm System,

Parameter	Frequency Range (GHz)	Min.	Typ.	Max.	Units
Insertion Loss	2-5			0.8	dB
	5-8			0.9	dB
Isolation	2-8	20			dB
VSWR(Input)	2-8			1.4	
VSWR(output)	2-8			1.3	
Phase Unbalance	2-8		-	±4	deg
Amplitude Unbalance	2-8			±0.3	dB
Forward Power	2-8			30	W cw
Reverse Power	2-8			2	W cw
Impedance	2-8	-55		+85	°C
Operating Temperature	50				Ohms
Input / Output Connector	SMA-female				
Finishing	Gray Paint				
Material	Aluminum				








RF-LAMBDA

The power beyond expectations

RFLT4W2G08G

2.0GHz-8.0GHz 4-Way Power Divider

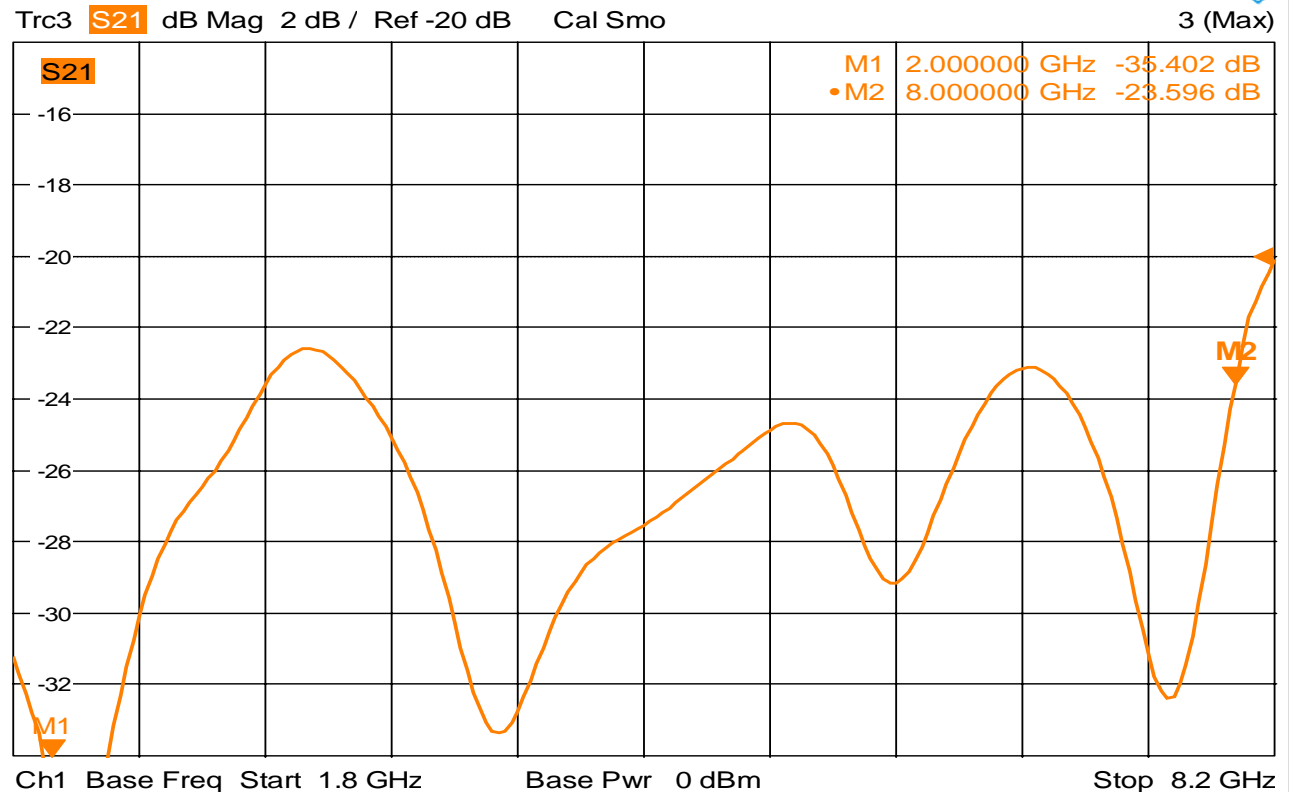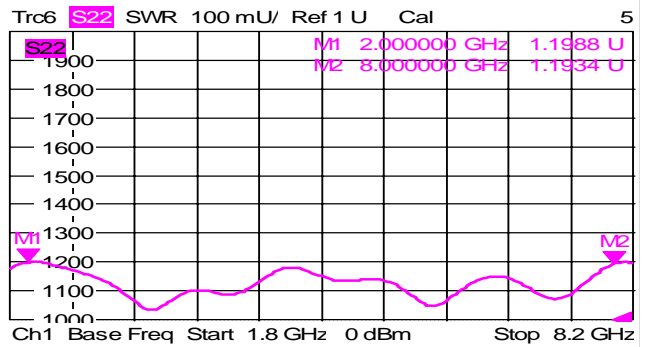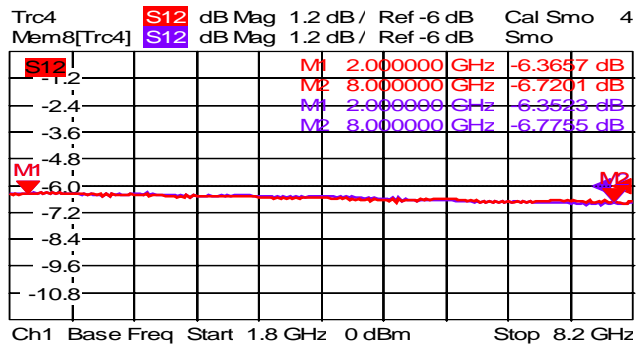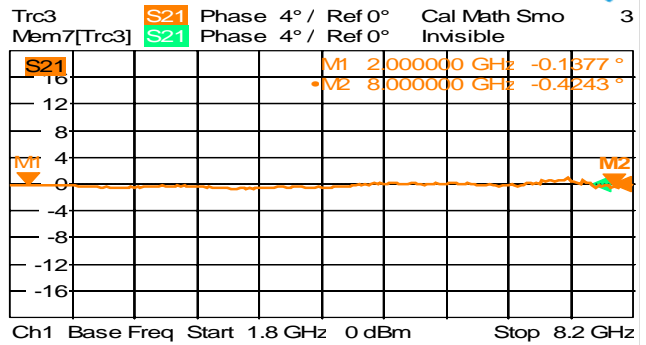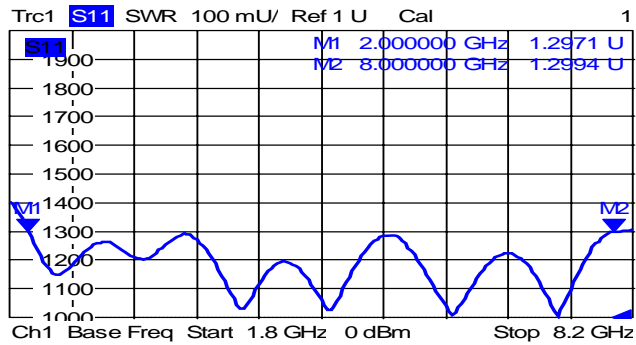




RF-LAMBDA

The power beyond expectations

RFLT4W2G08G

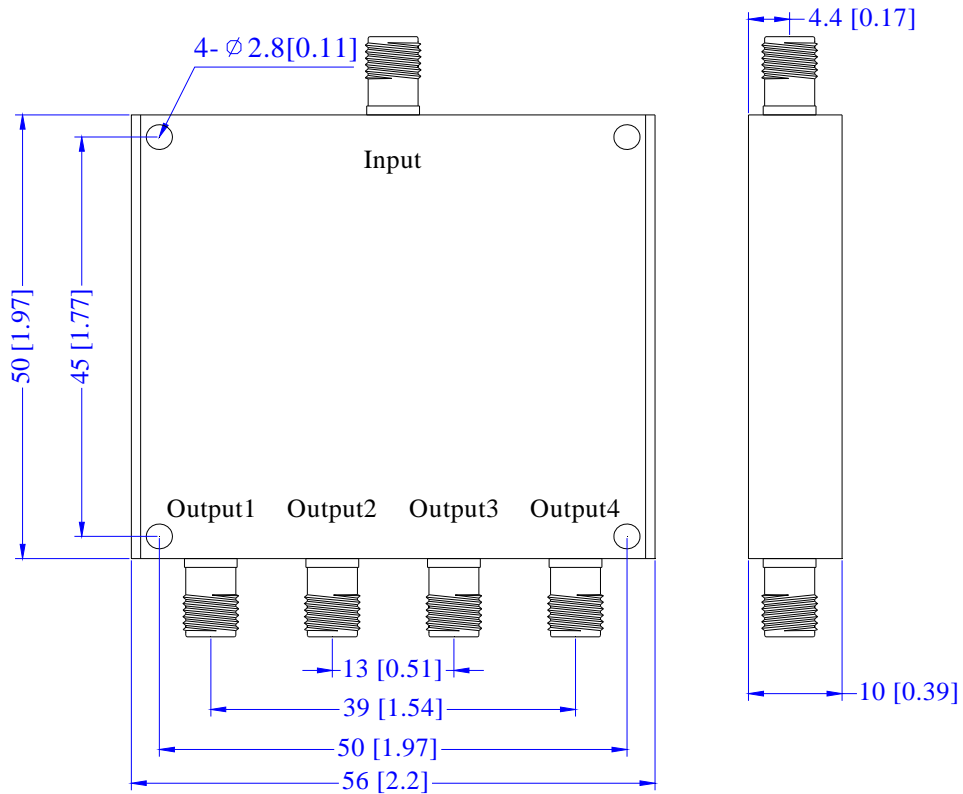

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

2.0GHz-8.0GHz 4-Way Power Divider