



Bandpass Filter

KR Model 2334

Passband Amplitude

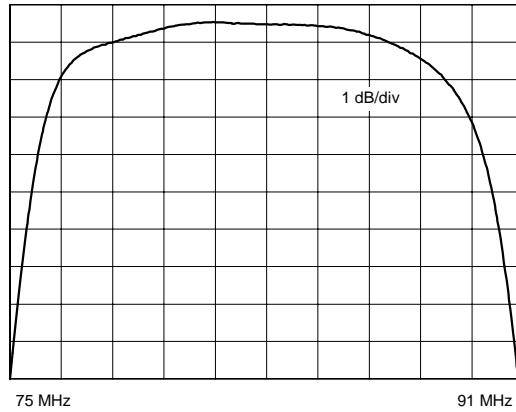


Overall Amplitude

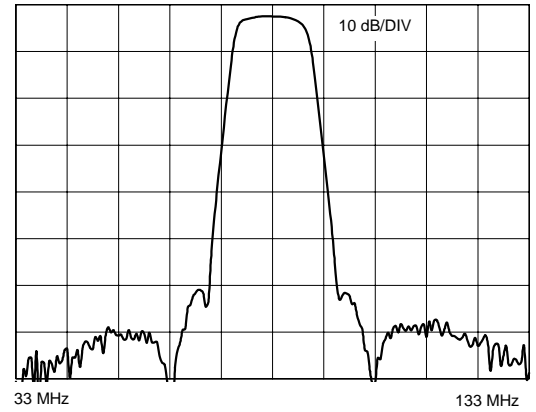

Specifications

| | |
|----------------------------------|-------------|
| KR Part Number | 2334 |
| Filter Type | Bandpass |
| Center Frequency | 83 MHz |
| Insertion Loss | < 3 dB |
| 70 MHz | > 55 dB |
| 72 MHz | > 30 dB |
| 79 MHz | < 1 dB |
| 83 MHz | Ref |
| 87 MHz | < 1 dB |
| 94 MHz | > 30 dB |
| 96 MHz | >55 dB |
| Source and Load Impedance | 75 Ω |

Outline Drawing

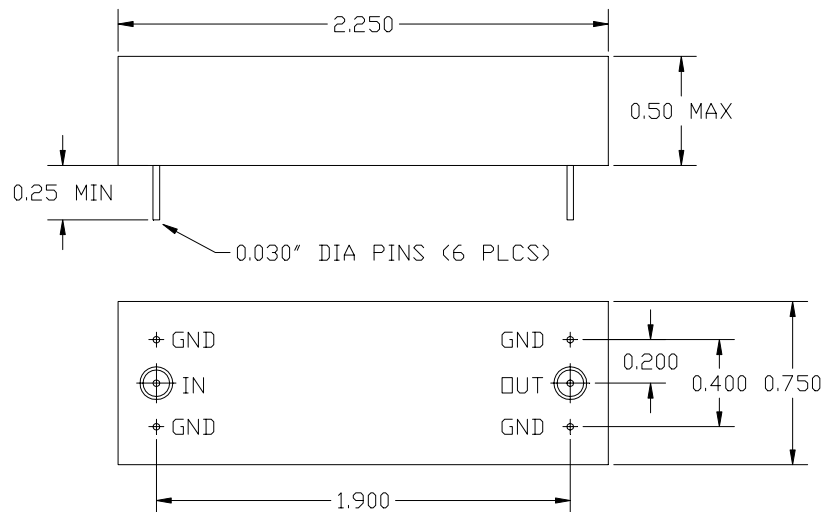

Dimensions in inches
Metal Case

KR Electronics
www.krfilters.com
91 Avenel Street
Avenel, NJ 07001
732-636-1900