

KR Electronics

General Description


KR Electronics part number 2937 is a 20 MHz lowpass filter.
Other bandwidths available. Please consult the factory.

Features

- 20 MHz End of Passband 3 dB
- Typical 45 dB at 44 MHz
- 50 Ω Source and Load

Typical Performance

Overall Response (10 dB/div)

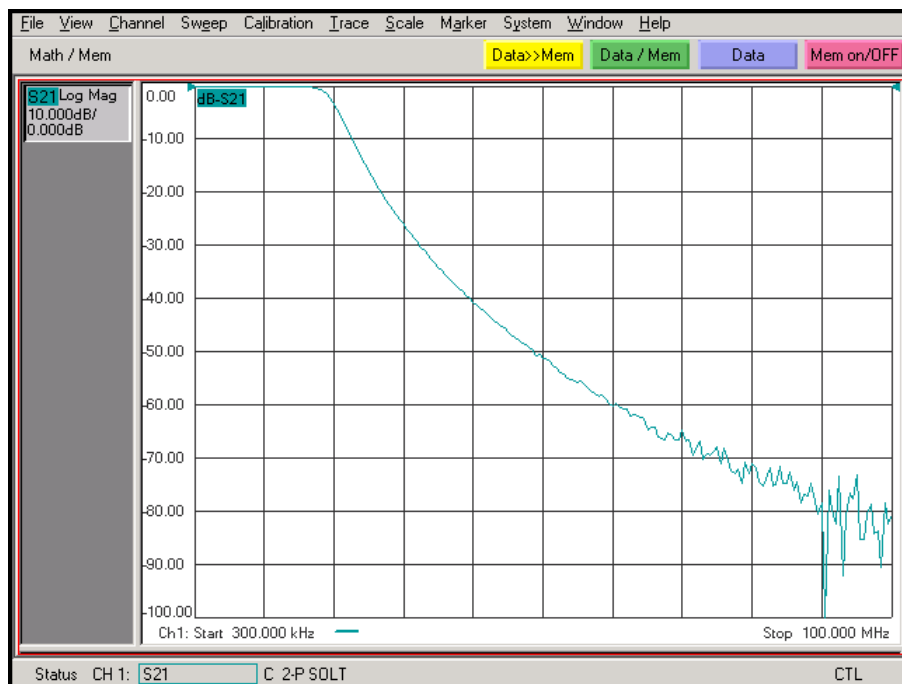


KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

Typical Performance

Passband Amplitude & Group Delay (1 dB/div & 10 nsec/div)

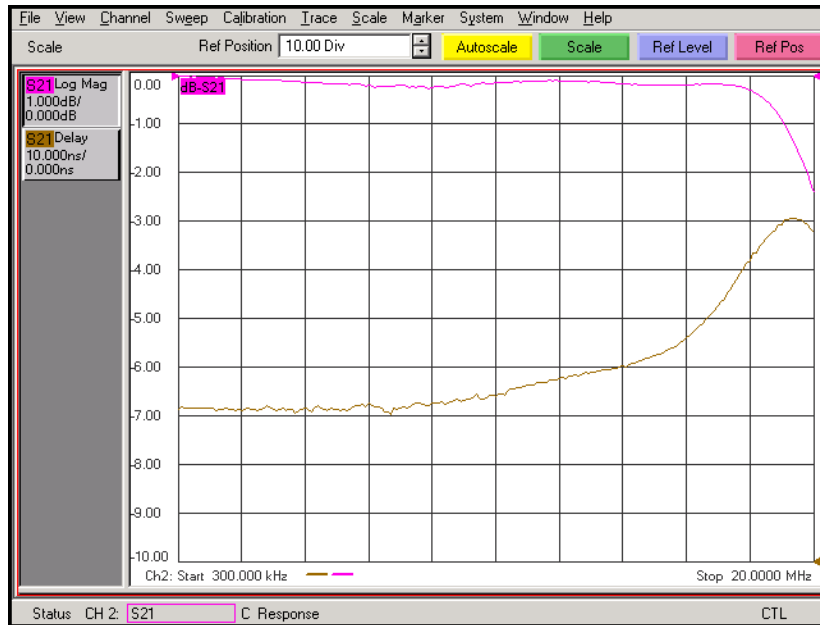

Overall Response to 1 GHz (10 dB/div)

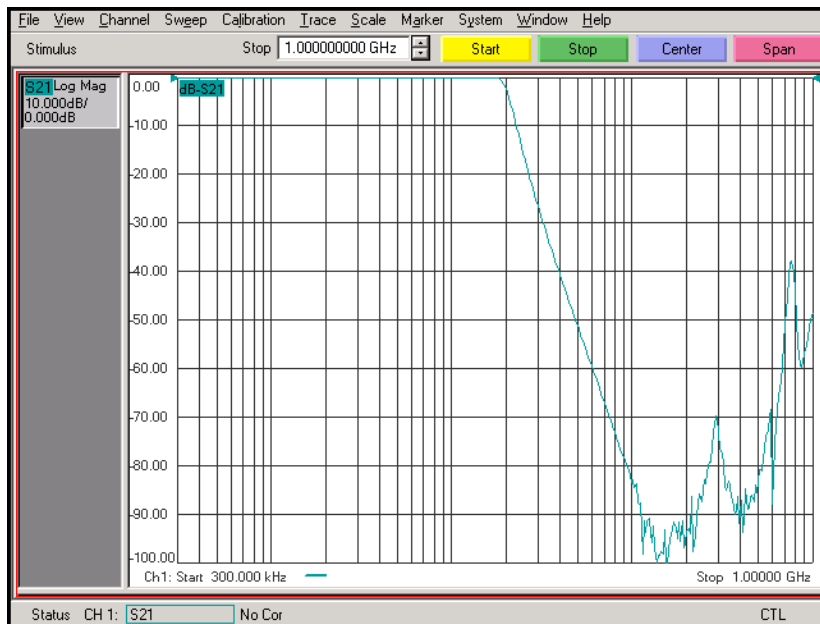

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web: www.krfilters.com
Email: sales@krfilters.com
Phone: (732) 636-1900
Fax: (732) 636-1982

KR Electronics 2937

Specifications

Parameter	Specification
Filter type	Lowpass
End of Passband (approx 3 dB)	20 MHz
Typical attenuation at 44.1 MHz	45 dB
Source and Load	50 Ω

Physical Dimensions

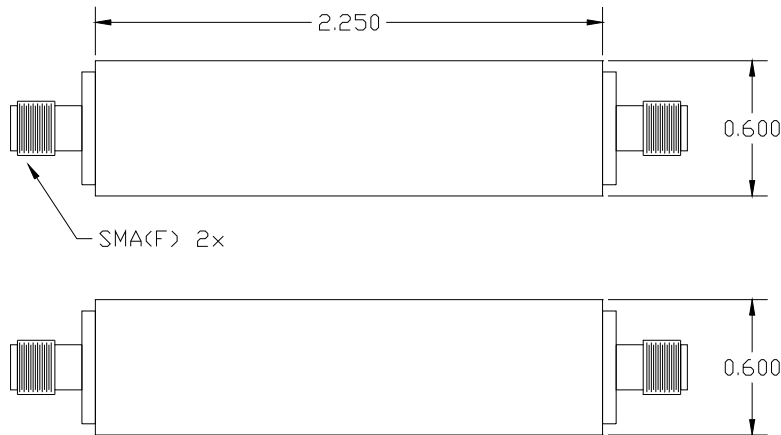

Notes:

1. Dimensions in inches
2. Rectangular case

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982