



# Bandpass Filter

KR Model 2322

## Passband Amplitude & Group Delay

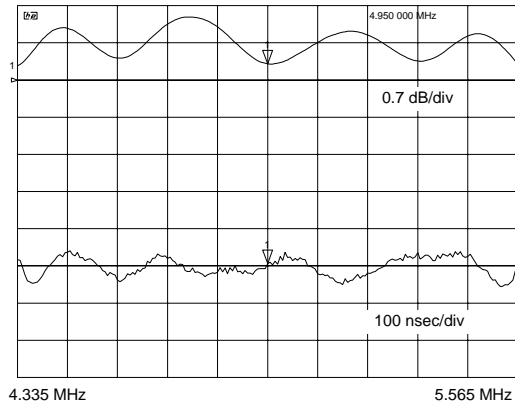


## Overall Amplitude

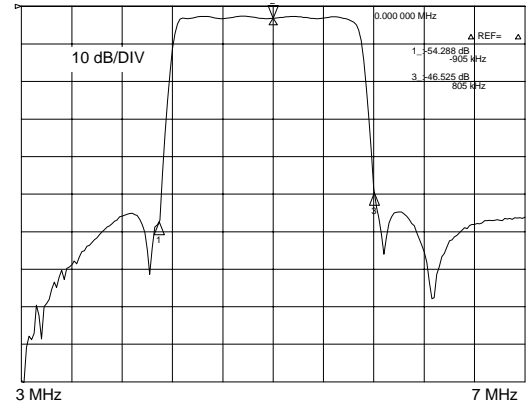

## Specifications

<b>KR Part Number</b>	<b>2322</b>
<b>Filter Type</b>	Bandpass
<b>Center Frequency</b>	4.95 MHz
<b>Insertion Loss</b>	<3.5 dB
<b>Passband <math>\pm 0.7</math> dB</b>	4.335 to 5.565 MHz
<b>Lower Stopband dc to 4.905 MHz</b>	> 45 dB
<b>Upper Stopband 5.805 to 100 MHz</b>	> 45 dB
<b>Group Delay Ripple 4.335 MHz to 5.565 MHz</b>	< $\pm 100$ nsec
<b>Source and Load Impedance</b>	75 $\Omega$

## Outline Drawing

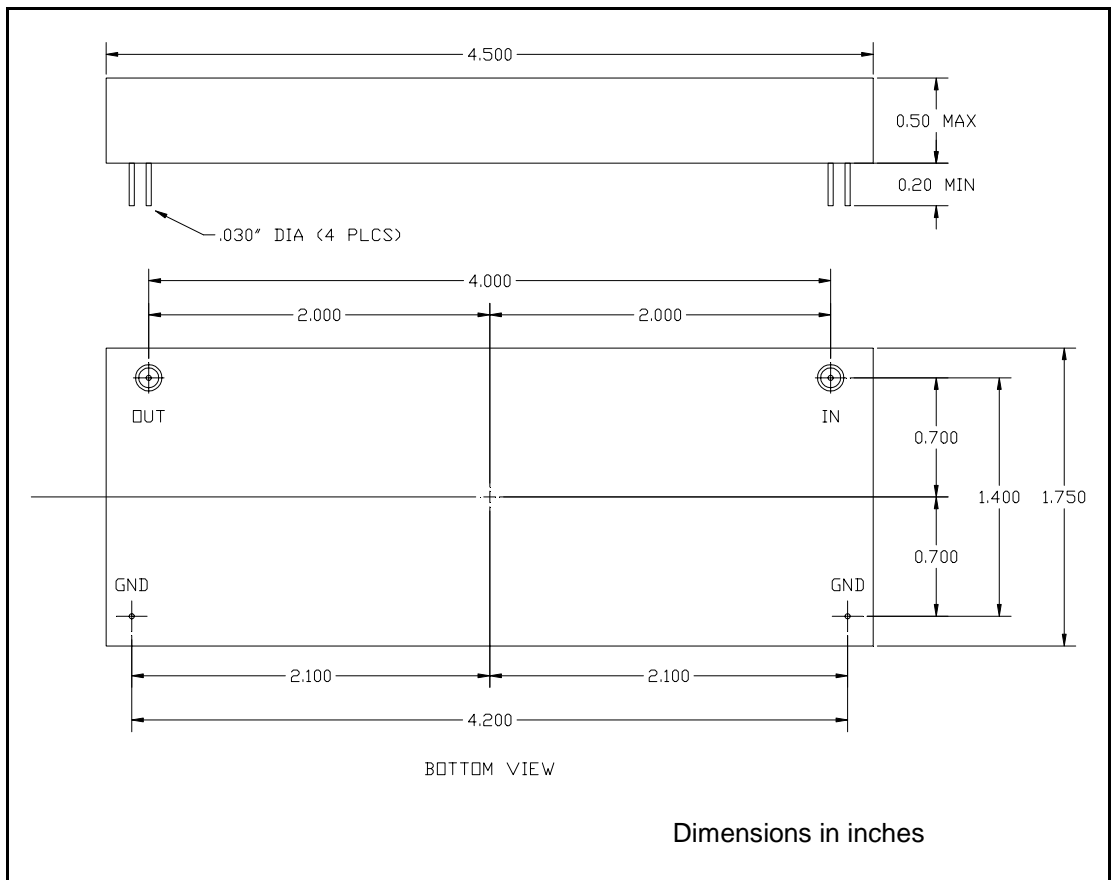

**KR Electronics**  
[www.krfilters.com](http://www.krfilters.com)  
 91 Avenel Street  
 Avenel, NJ 07001  
 732-636-1900