

KR Electronics

General Description


KR 2698 is an 20.9 MHz bandpass filter. Other passband frequencies are available. Please consult the factory.

Features


- 20.9 MHz Bandpass
- 11 MHz min 1 dB BW
- 50 Ω Source and Load
- BNC Connectors

Typical Performance

Passband Amplitude & Group Delay
(1 dB/div and 50 nsec/div)

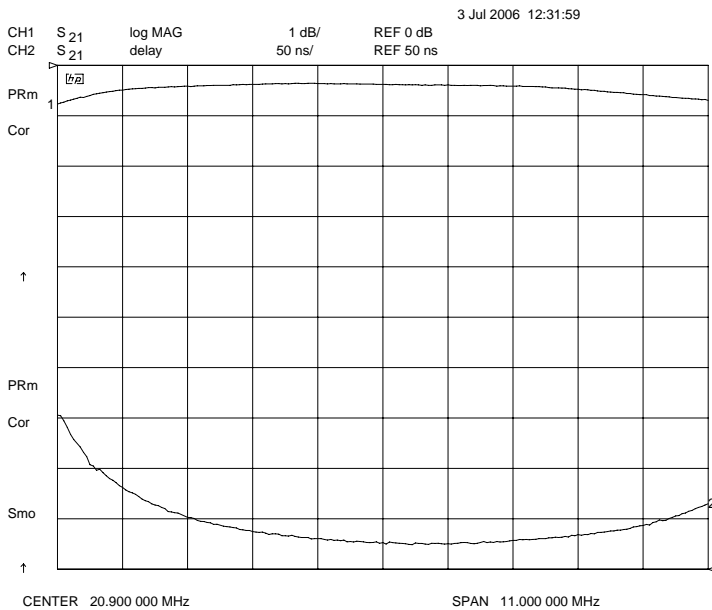

Overall Response
(10 dB/div)

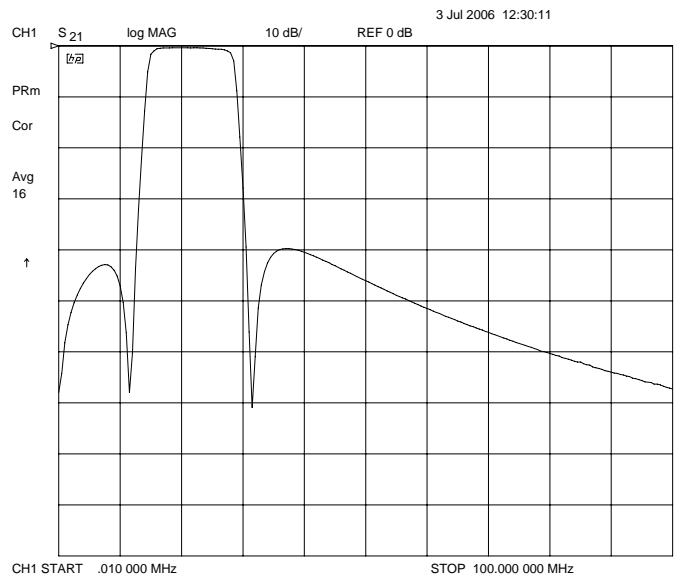

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2698 Bandpass

Specifications

Parameter	Specification	
Filter type	Bandpass	
Center Frequency	20.9 MHz	
Insertion Loss	< 1 dB	0.5 dB Typical
1 dB Bandwidth	11 MHz Min	13 MHz Typical
30 dB Bandwidth	18 MHz Max	17 MHz Typical
35 dB Bandwidth	20.5 MHz Max	17.5 MHz Typical
Source & Load	50 Ω	

Physical Dimensions

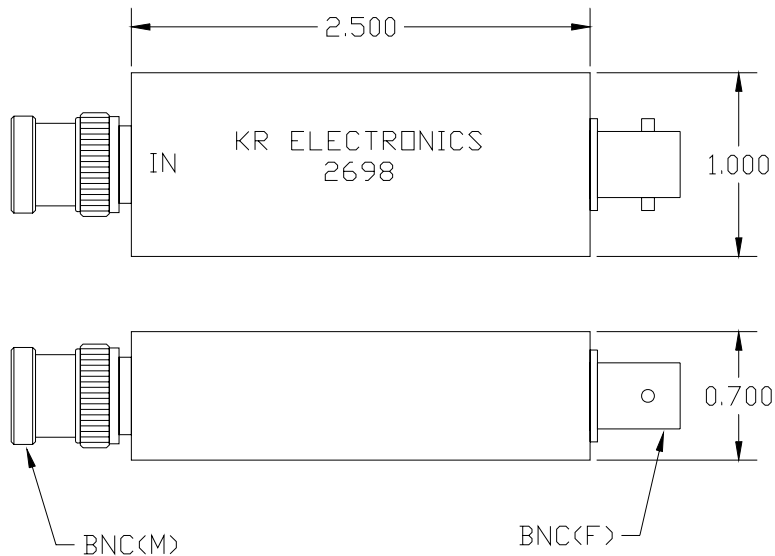

Dimensions shown in inches