



## 50 Ohm 2 Way SMA Resistive Power Divider From DC to 12.4 GHz Rated at 1 Watts

### TECHNICAL DATA SHEET

PE2067

#### 50 Ohm 2 Way SMA Resistive Power Divider From DC to 12.4 GHz Rated at 1 Watts

##### Configuration

Input Connector	SMA Male
Output Connectors	SMA Female
Frequency Range, GHz	DC to 12.4
Design	Resistive
Number of Output Ports	2

##### Electrical Specifications

Frequency Range, GHz	DC to 12.4
Impedance, Ohms	50
Maximum Insertion Loss, dB	6
Maximum Input Power, Watts	1
Maximum Input VSWR	1.2:1
Phase Balance, Degrees	± 2
Flatness, dB	0.4

##### Mechanical Specifications

###### Temperature

Operating Range, deg C	-65 to +125
------------------------	-------------

###### Size

Length, in [mm]	1.26 [32]
Width, in [mm]	0.375 [9.53]
Height, in [mm]	1 [25.4]

##### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	Yes
----------------	-----

##### Plotted and Other Data

Notes:	Values at 25 °C, sea level
--------	----------------------------

50 Ohm 2 Way SMA Resistive Power Divider From DC to 12.4 GHz Rated at 1 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm 2 Way SMA Resistive Power Divider From DC to 12.4 GHz Rated at 1 Watts PE2067](http://www.pasternack.com/2-way-sma-power-divider-dc-12.4-ghz-1-watts-pe2067-p.aspx)


URL: <http://www.pasternack.com/2-way-sma-power-divider-dc-12.4-ghz-1-watts-pe2067-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



# PE2067 CAD Drawing

50 Ohm 2 Way SMA Resistive Power Divider From DC to 12.4 GHz Rated at 1 Watts

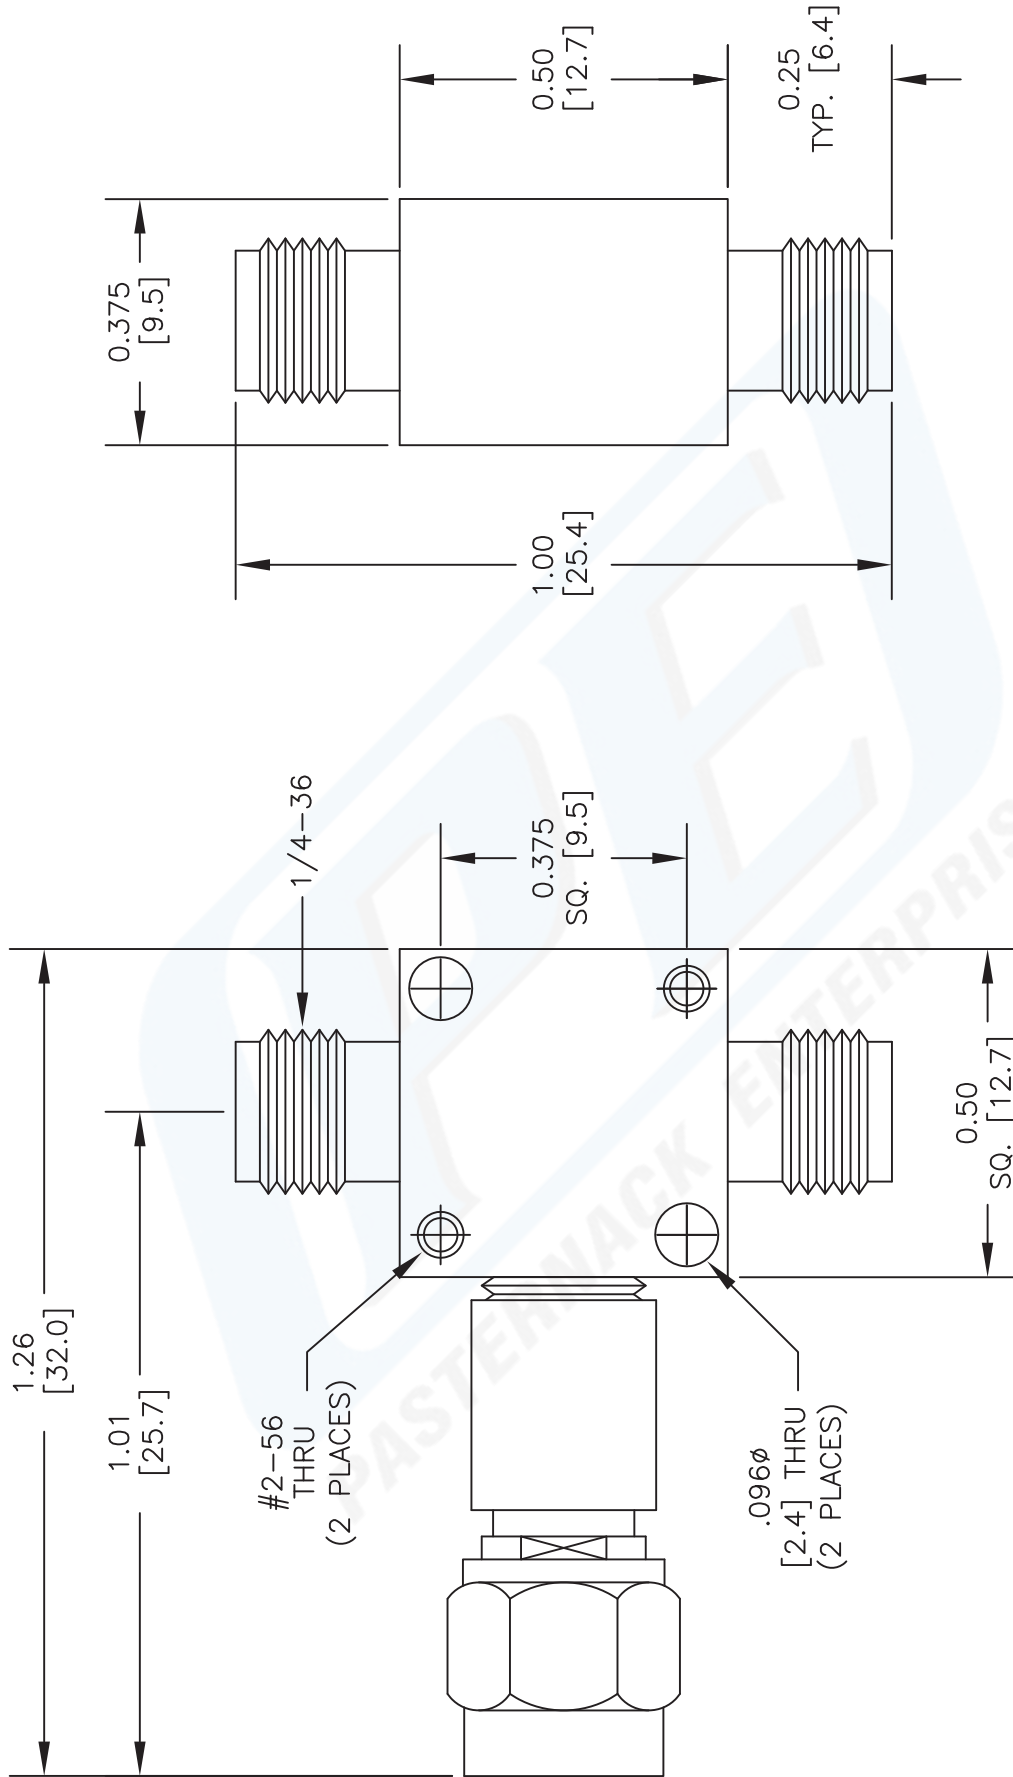

**NOTES:**

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

**PE2067**

**PASTERNAK ENTERPRISES, INC.**

P.O. BOX 16759, IRVINE, CA 92623  
 PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
 E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)

**COAXIAL & FIBER OPTICS**



ESTABLISHED 1972

FSCM NO. 53919

REV. A

CAD FILE 070512

SCALE N/A

SIZE A

2233