

# KR Electronics 2515 Lowpass Filter

## General Description


KR 2515 is a 50 MHz lowpass filter. The filter is group delay equalized and amplitude equalized. Please consult the factory for other passband or sampling frequencies.

## Features


- 50 MHz passband
- Sharp transition to 60 dB
- 50  $\Omega$
- SMA connectors

## Typical Performance

**Passband Amplitude & Group Delay**  
(0.25 dB/div & 5 nsec/div 100 KHz to 50 MHz)

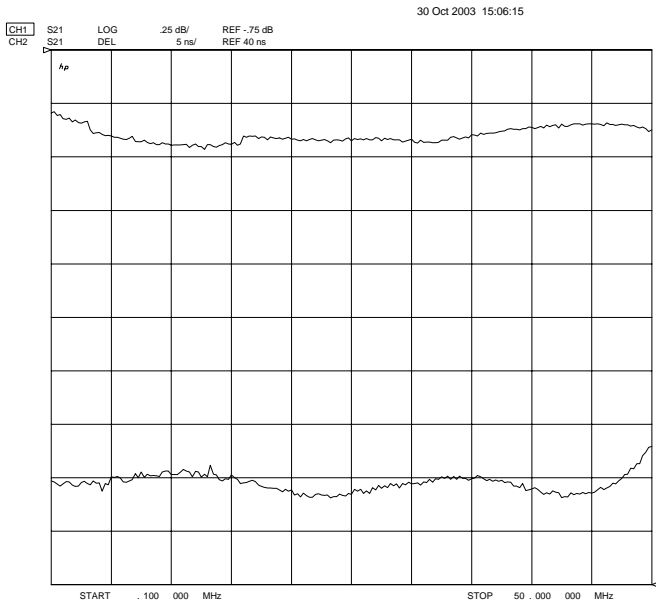

**Overall Response**  
(10 dB/div 1 MHz to 1 GHz)

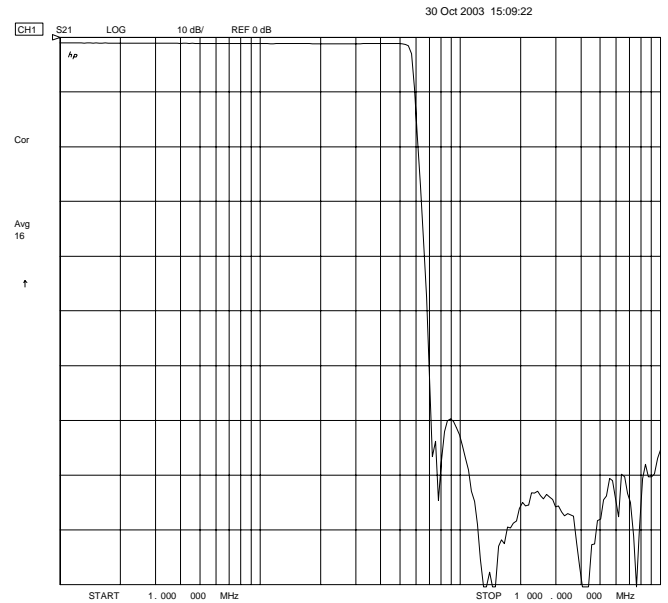

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR 2515

## Specifications

Parameter	Specification
Filter type	Lowpass
End of Passband (< 0.25 dB)	50 MHz
Insertion Loss (at 100 KHz)	< 2 dB (1 dB Typical)
Group Delay Ripple to 44 MHz	< 5 nsec
Group Delay Ripple to 50 MHz	< 12 nsec
Attenuation at 68 MHz	> 40 dB
Attenuation at 73.6 MHz	> 60 dB
Source & Load	50 Ω

## Physical Dimensions

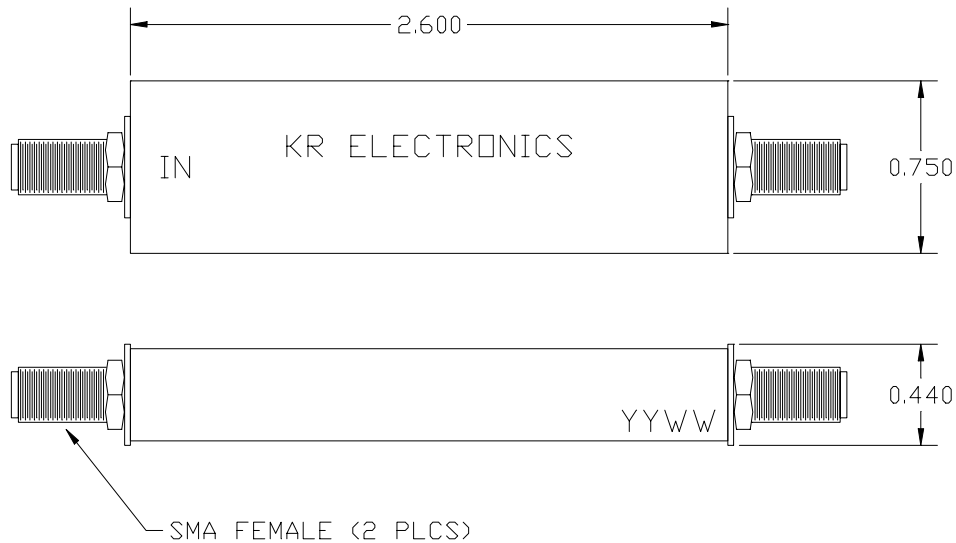

Dimensions in inches