

50 MHz < Fco < 150 MHz

Low Pass

Slope 1.26 x Fco

Stopband Limit 600 MHz


WLC9-\_\_\_

Attenuation 60 dB


### Specifications

<b>Passband:</b>	DC to ___ MHz
<b>Passband Insertion Loss:</b>	0.3 dB max. (0.4 dB max. at Fco)
<b>Passband Return Loss:</b>	17 dB min. (VSWR 1.33:1 max.)
<b>Stopband:</b>	Stopband Limit 600 MHz
<b>Stopband Attenuation:</b>	60 dB min.
<b>Operating Temperature:</b>	5 °C to 45 °C
<b>Power Handling:</b>	max. 2500 W CW into a 2:1 VSWR ( <i>Please see our <a href="#">warranty</a> in this regard</i> )
<b>Dimensions (L x W x H):</b>	max. 460 x 200 x 90 mm (plus connectors)
<b>Approx. Weight:</b>	8.4 kg
<b>Mounting Provision:</b>	4 x M4 threaded holes on all sides
<b>Connector 1:</b>	- Please choose -
<b>Connector 2:</b>	- Please choose -

### Typical Performance

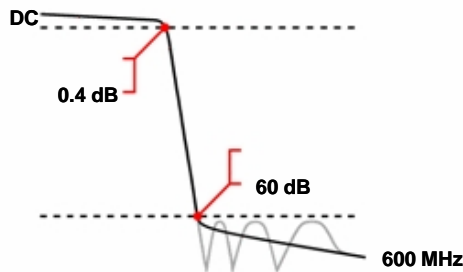

### 9 Section Chebyshev Design

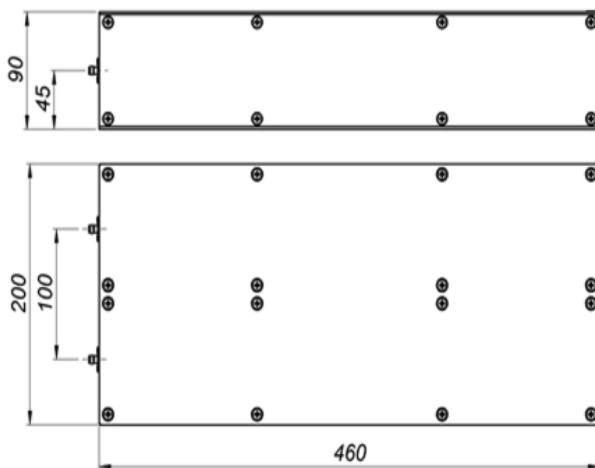

### Connector Options

- N Female
- N Male
- 7/16 Female

### Euro Prices

(USD Prices will be quoted for US-based customers only)

<b>1 - 4 pcs:</b>	€ 2791
<b>5 - 9 pcs:</b>	€ 2512
<b>10 - 24 pcs:</b>	€ 2261

### Delivery Terms

FCA Andechs (free carrier) according to **Incoterms 2010**  
 In Deutschland liefern wir frachtfrei gemäß CPT **Incoterms 2010** (unversichert).  
 Regarding payment terms and warranty see [Terms and Conditions](#).  
**Delivery time:** normally 3 to 4 weeks - depending on quantity ordered and on our work load.

Customer is responsible for observing all applicable export laws in regard to filter application and location of end user



**Wainwright Instruments GmbH**  
 www.wainwright-filters.com

Tel: +49 8152 918230  
 Fax: +49 8152 918255  
 info@wainwright-filters.com