



50 Ohm TNC DC Block Operating From 10 MHz to 18 GHz

TECHNICAL DATA SHEET

PE8221

50 Ohm TNC DC Block Operating From 10 MHz to 18 GHz

Configuration

Design	Inner/Outer DC Block
Body Style	Straight
Impedance	50 Ohms
Connector 1	TNC Male
Connector Specification 1	MIL-STD-348
Connector 2	TNC Female
Connector Specification 2	MIL-STD-348

Electrical Specifications

Frequency Range, GHz	0.01 to 18
Impedance, Ohms	50
Maximum VSWR	1.35:1
Maximum Insertion Loss, dB	0.75
Maximum Operating Voltage, Vrms	200

Mechanical Specifications

Size	
Length, in [mm]	2.07 [52.58]
Width/Dia., in [mm]	0.59 [14.99]

Connector 1

Type	TNC Male
------	----------

Connector 2

Type	TNC Female
------	------------

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm TNC DC Block Operating From 10 MHz to 18 GHz PE8221](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



50 Ohm TNC DC Block Operating From 10 MHz to 18 GHz

TECHNICAL DATA SHEET

PE8221

Plotted and Other Data

Notes:

Values at 25 °C, sea level

50 Ohm TNC DC Block Operating From 10 MHz to 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm TNC DC Block Operating From 10 MHz to 18 GHz PE8221](#)

URL: <http://www.pasternack.com/50-ohm-tnc-inner-outer-dc-block-0.1-18-ghz-pe8221-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



PE8221 CAD Drawing
50 Ohm TNC DC Block Operating From 10 MHz to 18 GHz

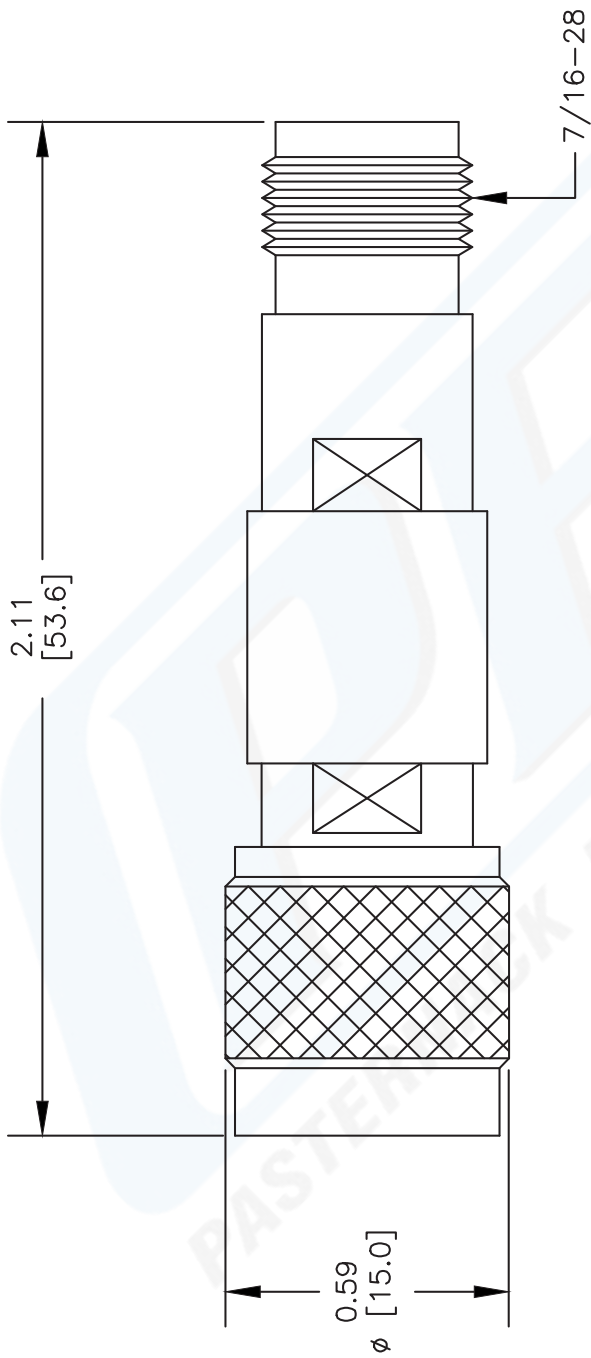

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE8221

FSCM NO. 53919

127

SIZE A

SCALE N/A

CAD FILE 112103

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com