



6 dB Fixed Attenuator, BNC Male To BNC Female
 Brass Nickel Body Rated To 2 Watts Up To 4 GHz

TECHNICAL DATA SHEET

PE7049-6

6 dB Fixed Attenuator, BNC Male To BNC Female Brass Nickel Body Rated To 2 Watts Up To 4 GHz

Configuration

Design	Fixed, Bidirectional Attenuator
Connector 1	BNC Male
Connector 2	BNC Female
Body Material and Plating	Brass, Nickel

Electrical Specifications

Frequency Range, GHz	DC to 4
Impedance, Ohms	50
Attenuation Value, dB	6
Maximum Input Power, Watts	2

Frequency 1

Range, GHz	DC to 4
VSWR	1.25:1
Attenuation Accuracy, dB	± 0.3

Mechanical Specifications

Temperature

Operating Range, deg C	-65 to +125
------------------------	-------------

Size

Length, in [mm]	1.36 [34.54]
Width, in [mm]	0.57 [14.48]

Connector 1

Type	BNC Male
Connector Specification	MIL-STD-348
Contact Material and Plating	Beryllium Copper, Gold
Coupling Nut Material and Plating	Brass, Nickel
Body Material and Plating	Brass, Nickel

Connector 2

Type	BNC Female
Connector Specification	MIL-STD-348
Contact Material and Plating	Beryllium Copper, Gold
Body Material and Plating	Brass, Nickel

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 dB Fixed Attenuator, BNC Male To BNC Female Brass Nickel Body Rated To 2 Watts Up To 4 GHz PE7049-6](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





6 dB Fixed Attenuator, BNC Male To BNC Female
Brass Nickel Body Rated To 2 Watts Up To 4 GHz

TECHNICAL DATA SHEET

PE7049-6

Plotted and Other Data

Notes:

Values at 25 °C, sea level

6 dB Fixed Attenuator, BNC Male To BNC Female Brass Nickel Body Rated To 2 Watts Up To 4 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 dB Fixed Attenuator, BNC Male To BNC Female Brass Nickel Body Rated To 2 Watts Up To 4 GHz PE7049-6](http://www.pasternack.com/6db-fixed-bnc-male-bnc-female-2-watts-attenuator-pe7049-6-p.aspx)


URL: <http://www.pasternack.com/6db-fixed-bnc-male-bnc-female-2-watts-attenuator-pe7049-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE7049-6 CAD Drawing

6 dB Fixed Attenuator, BNC Male To BNC Female Brass
Nickel Body Rated To 2 Watts Up To 4 GHz

P/N	ATTEN.	FIGURE
PE7049-1	1 dB	1
PE7049-2	2 dB	1
PE7049-3	3 dB	1
PE7049-6	6 dB	1
PE7049-10	10 dB	1
PE7049-20	20 dB	1
PE7049-30	30 dB	1

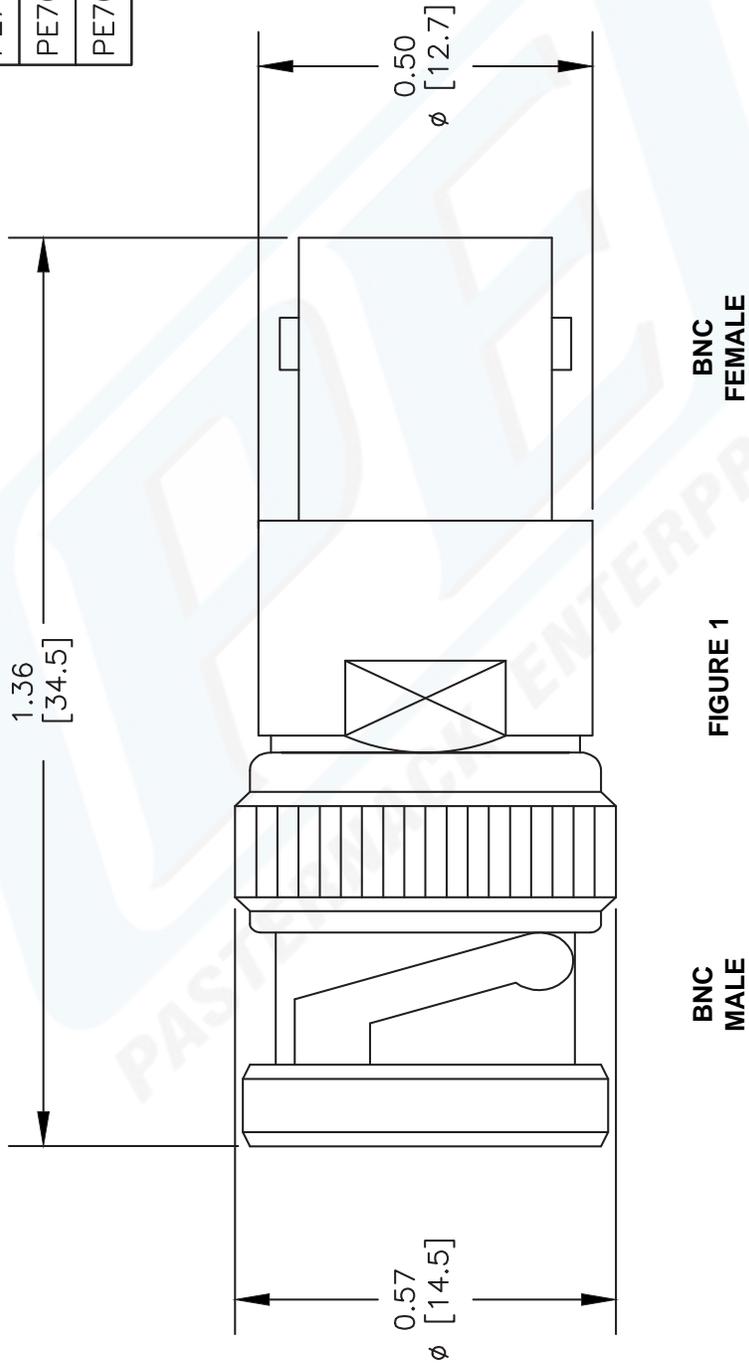

DWG TITLE

PE7049

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 030613

SCALE N/A

SIZE A

XXXX

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com