



10 dB Fixed Attenuator, 7/16 DIN Female To 7/16 DIN
 Male Directional Rated To 50 Watts Up To 7.5 GHz

TECHNICAL DATA SHEET

PE7310-10

10 dB Fixed Attenuator, 7/16 DIN Female To 7/16 DIN Male Directional Rated To 50 Watts Up To 7.5 GHz

Configuration

| | |
|---------------------------|-----------------------------------|
| Design | Fixed, Directional Attenuator |
| Connector 1 | 7/16 DIN Female |
| Connector 2 | 7/16 DIN Male |
| Body Material and Plating | Aluminum Heatsink, Black Anodized |

Electrical Specifications

| | |
|----------------------------|-----------|
| Frequency Range, GHz | DC to 7.5 |
| Impedance, Ohms | 50 |
| Attenuation Value, dB | 10 |
| Maximum Input Power, Watts | 50 |
| Maximum VSWR | 1.45:1 |

Frequency 1

| | |
|--------------------------|---------|
| Range, GHz | DC to 6 |
| VSWR | 1.3:1 |
| Attenuation Accuracy, dB | 0.75 |

Frequency 2

| | |
|--------------------------|----------|
| Range, GHz | 6 to 7.5 |
| VSWR | 1.45:1 |
| Attenuation Accuracy, dB | 0.75 |

Mechanical Specifications

Temperature

| | |
|------------------------|-------------|
| Operating Range, deg C | -55 to +125 |
|------------------------|-------------|

Size

| | |
|-----------------|----------------|
| Length, in [mm] | 4.01 [101.85] |
| Width, in [mm] | 3 [76.2] |
| Height, in [mm] | 3 [76.2] |
| Weight, lbs [g] | 1.796 [814.65] |

Connector 1

| | |
|------------------------------|-----------------|
| Type | 7/16 DIN Female |
| Contact Material and Plating | Brass, Silver |
| Hex Size, In. | 11/16 |
| Body Material and Plating | Brass, Silver |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB Fixed Attenuator, 7/16 DIN Female To 7/16 DIN Male Directional Rated To 50 Watts Up To 7.5 GHz PE7310-10](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



10 dB Fixed Attenuator, 7/16 DIN Female To 7/16 DIN
Male Directional Rated To 50 Watts Up To 7.5 GHz

TECHNICAL DATA SHEET

PE7310-10

Connector 2

| | |
|--------------------------------------|---------------|
| Type | 7/16 DIN Male |
| Contact Material and Plating | Brass, Silver |
| Outer Conductor Material and Plating | Brass, Silver |
| Hex Size, In. | 11/16 |
| Body Material and Plating | Brass, Silver |

Compliance Certifications (visit www.Pasternack.com for current document)

| | |
|----------------|-----|
| RoHS Compliant | Yes |
|----------------|-----|

Plotted and Other Data

| | |
|--------|---|
| Notes: | Values at 25 °C, sea level OUTPUT PORT HANDLES 5 WATTS MAX POWER |
|--------|---|

URL: <http://www.pasternack.com/10db-fixed-7-16-female-7-16-male-50-watts-attenuator-pe7310-10-p.aspx>

10 dB Fixed Attenuator, 7/16 DIN Female To 7/16 DIN Male Directional Rated To 50 Watts Up To 7.5 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.


PE7310-10 CAD Drawing

10 dB Fixed Attenuator, 7/16 DIN Female To 7/16 DIN Male

Directional Rated To 50 Watts Up To 7.5 GHz

| xx | Input Connector | Output Connector |
|----|-----------------|------------------|
| 10 | 7/16 Female | 7/16 Male |
| 11 | N Female | 7/16 Male |
| 12 | 7/16 Male | 7/16 Female |
| 13 | 7/16 Female | 7/16 Female |
| 14 | N Male | 7/16 Female |
| 15 | N Female | 7/16 Female |
| 16 | 7/16 Female | N Male |
| 17 | N Female | N Male |
| 18 | SMA Female | N Male |
| 19 | TNC Female | N Male |
| 20 | 7/16 Male | N Female |
| 21 | 7/16 Female | N Female |
| 22 | N Male | N Female |
| 23 | N Female | N Female |
| 24 | SMA Male | N Female |
| 25 | SMA Female | N Female |
| 26 | TNC Male | N Female |
| 27 | TNC Female | N Female |
| 28 | 7/16 Female | SMA Male |
| 29 | N Female | SMA Male |
| 30 | SMA Female | SMA Male |
| 31 | TNC Female | SMA Male |
| 32 | 7/16 Male | SMA Female |
| 33 | 7/16 Female | SMA Female |
| 34 | N Male | SMA Female |
| 35 | N Female | SMA Female |
| 36 | SMA Male | SMA Female |
| 37 | SMA Female | SMA Female |
| 38 | TNC Male | SMA Female |
| 39 | TNC Female | SMA Female |
| 40 | 7/16 Female | TNC Male |
| 41 | N Female | TNC Male |
| 42 | SMA Female | TNC Male |
| 43 | TNC Female | TNC Male |
| 44 | 7/16 Male | TNC Female |
| 45 | 7/16 Female | TNC Female |
| 46 | N Male | TNC Female |
| 47 | N Female | TNC Female |
| 48 | SMA Male | TNC Female |
| 49 | SMA Female | TNC Female |
| 50 | TNC Male | TNC Female |
| 51 | TNC Female | TNC Female |

| Table of Information | |
|----------------------|----------------|
| Connector Type | DIM "A" (REF.) |
| SMA Male | 0.68 |
| SMA Female | 0.54 |
| TNC Male | 0.98 |
| TNC Female | 0.94 |
| N Female | 0.95 |
| N Male | 0.98 |
| 7/16 Male | 1.12 |
| 7/16 Female | 1.16 |

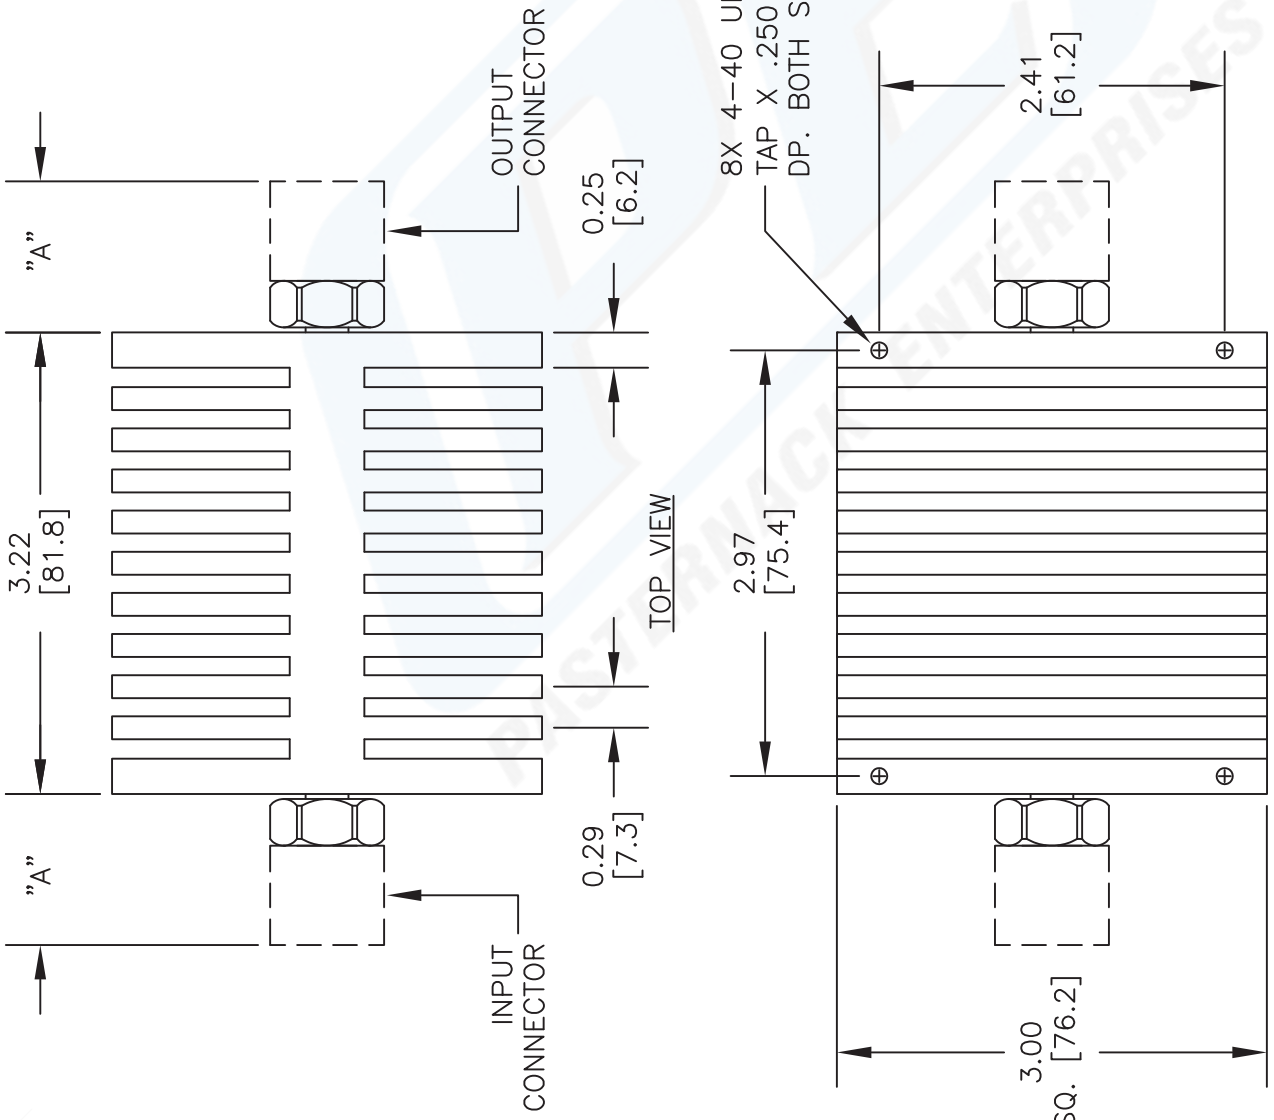

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE73xx-yy

FSCM NO. 53919

CAD FILE 102512

SCALE N/A

SIZE A

2233

PE PASTERNAK®
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com