

**AN-XA7XXXX-X Series
HF SMD TCXO/VCTCXO
Ultra Low Phase Noise**


Rev. N

Description: The AN-XA7XXXX Series of SMD temperature compensated crystal oscillators (TCXO), provides High Frequency with excellent temperature stability, extremely low phase noise and jitter with Sine-wave output in a small surface mount FR4 based package.

Features

- **Small, Low Profile SMD Package**
- **Very Low Phase Jitter and Phase Noise**
- **Excellent Frequency Stability**
- **Frequency – up to 250 MHz**
- **No Multiplication – no sub-harmonics**
- **Stratum3 available**
- **COTS/Dual use**

Creating a Part Number

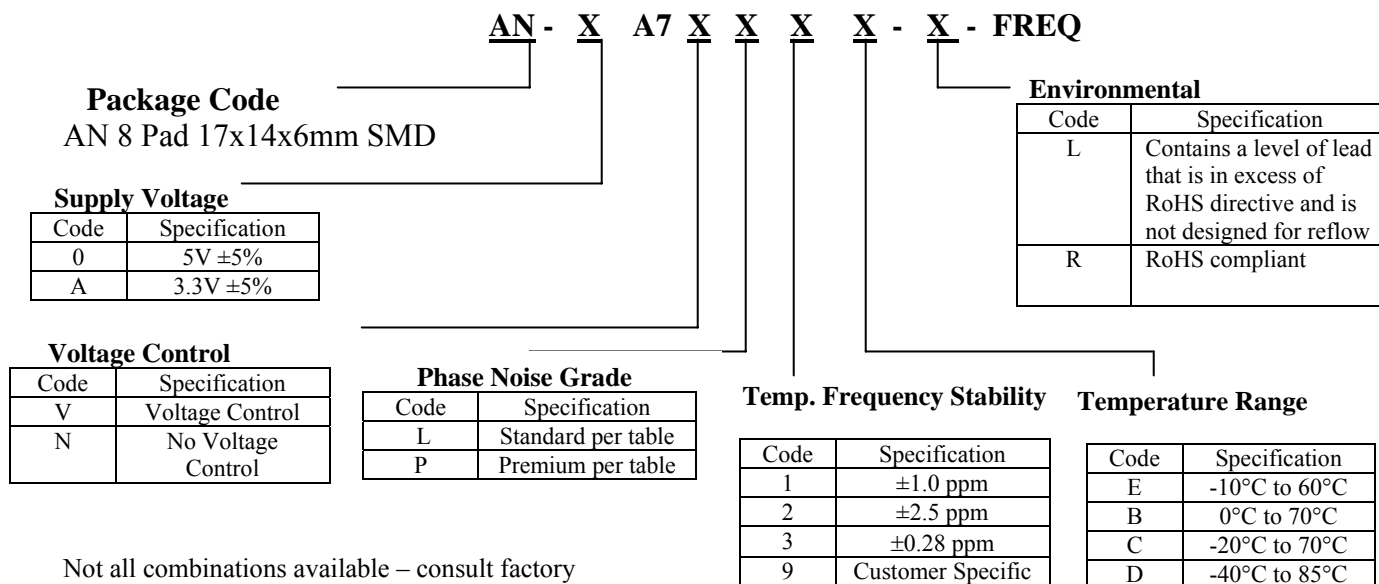

AN-XA7XXXX-X Series

Rev. N

(1)

Specifications

Parameter	Symb	Condition	Min	Typ	Max	Unit	Note	
Electrical								
Frequency Range	F	Sine-wave	10		250	MHz		
Input Voltage	Vcc		3.135 4.75	3.30 5.0	3.465 5.25	V	A 0	
Input Current	Icc	Sine			40	mA	@100MHz, 3.3V	
Frequency Stab.	ΔF/F	Overall, available			±4.6		20 years	
Frequency Stability	ΔF/F	vs. Temperature vs. Vcc aging		±0.5 ±0.1 ±1 ±2.5 ±3.5	±1	ppm ppm/V ppm/year ppm ppm	See chart First Year 7 years 10 years	
Calibration	ΔF/F	As shipped, 25°C			±0.5	±1	ppm	
Load		Sine	Internally AC-coupled 50 Ohm					
Output power ⁽²⁾	P	Sine-wave Into 50 Ohms	0 4	3 7		dBm	3.3V 5.0V	
Start up time	Ts			2	100	ms		
Phase Jitter		1σ		0.4 0.2	1 0.4	ps	100Hz to 20MHz 12KHz to 20MHz	
Subharmonics					none			
Spurious					-60	dBc		
Harmonics		Sine-wave		-30	-25	dBc		
SSB Phase Noise		@10Hz @100 Hz @1 KHz @10 KHz @100 KHz		-80 -110 -140 -155 -160		dBc/Hz	@100MHz, Grade L	
SSB Phase Noise		@10Hz @100 Hz @1 KHz @10 KHz @100 KHz		-90 -120 -150 -160 -165			@100MHz, Grade P	
SSB Phase Noise		@10Hz @100 Hz @1 KHz @10 KHz @100 KHz		-105 -135 -150 -160 -165		dBc/Hz	@20 MHz	
Input Impedance				>10K Ohm				
Control voltage	Vc		0		3.0	V		
Modulation bandwidth	MB				1.5	Hz		
Deviation	ΔF/F	Vc=0V to 3.3V, 25°C	±5	±7		ppm		

Note 1) All parameters, unless otherwise specified, are at nominal conditions, ie: T=25°C, Nominal Vcc & Nominal Load
 2) Higher output power available – consult factory (current consumption may increase)

Absolute Maximum Ratings


Parameter	Symb	Condition	Min	Typ	Max	Unit	Note
Input Break Down Voltage	Vcc		-0.5		5.5	V	
Storage temp.	Ts		-40		105	° C	
Contr. Voltage	Vc		-1		9	V	

AN-XA7XXXX-X Series

Rev. N

Environmental and Mechanical


Operating temp. range	0°C to 70°C, -40°C to 85°C, see chart, page 1
Mechanical Shock	Per MIL-STD-202, Method 213, Cond. E
Thermal Shock	Per MIL-STD-883, Method 1011, Cond. A
Vibration	Per MIL-STD-883, Method 2007, Cond. A
Soldering Conditions	See MAX reflow profile; The device may be reflowed once. Reflowing upside down is not allowed. NO CLEAN assembly is recommended.
Hermetic Seal	Leak rate less than 1×10^{-8} atm.cc/s of helium (crystal only)

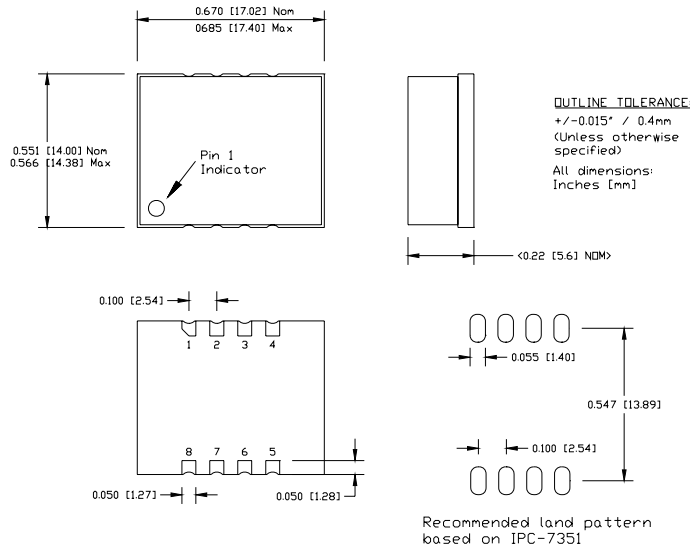

Electrical Connections

Pin out	Pin 1=Vcc; Pin 2=Do Not Connect; Pin 3=GND; Pin 4=GND; Pin 5=Output; Pin 6= Optional Voltage Control; Pin 7 & 8= Do Not Connect
---------	---

Maximum solder reflow profile

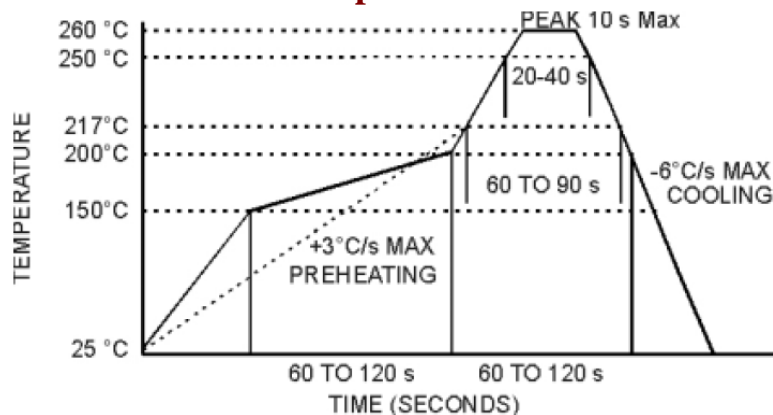

The device may be reflowed once. Reflowing upside down is not allowed. NO CLEAN assembly is recommended.