

# Voltage Controlled Oscillator

# RS2213AM

Optimized Band 2175 to 2250 MHz

Rev. A

## Features

- Low phase noise
- Linear tuning characteristics
- Low pushing / Low pulling
- Aqueous washable

## Applications


- SATCOM
- Receiver
- Test Equipment
- Radar
- Point-to-Point
- Radio
- MMDS
- WiMax

## Electrical Characteristics



Parameter	Units	Min	Typ	Max
Operating Frequency Range	MHz	2175		2250
Output Power	dBm		2.5	
Output Impedance	$\Omega$		50	
Phase Noise	@10kHz offset		-107	
	@100kHz offset		-127	
Tuning Voltage (Vt)	Vdc	+0.5		+4.5
Tuning Voltage Sensitivity (Kv)	MHz/V		26	
2nd Harmonic Suppression	dBc		-20	
Power Supply (Vcc)	Voltage	Vdc	5	
	Current	mA	26	
Pushing Figure	MHz/V		0.3	
Pulling Figure	MHz		1	
Input Capacitance	pF		47	
Operating Temp. Range	$^{\circ}\text{C}$	-40		+85

## Dimensions

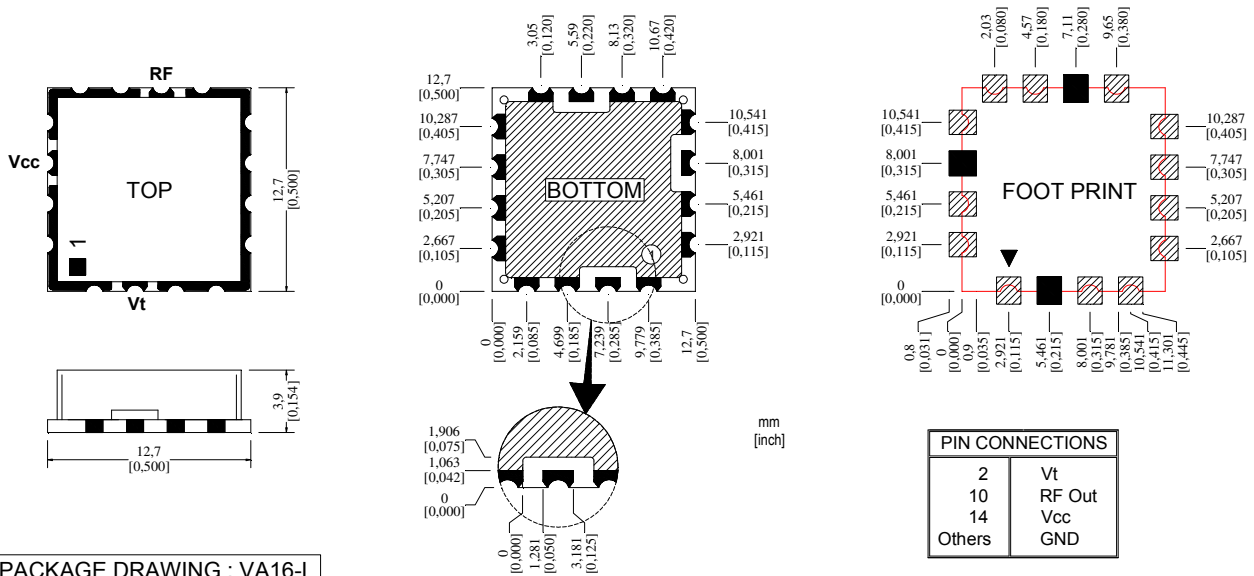

PACKAGE DRAWING : VA16-L