


## Features

- 3 wire serial integer PLL
- Compact Size 0.75"x0.75"x0.23"
- Low phase noise
- Programming : LMX2326(NSC)

## Applications

- SATCOM radio link
- Receiver
- Test Equipment
- Radar
- Point-to-Point radio
- MMDS
- WiMAX

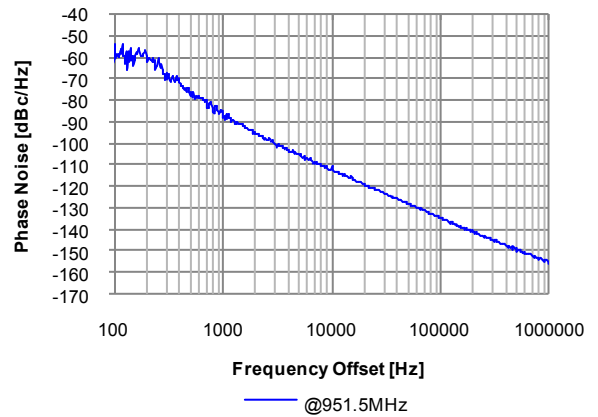


## Electrical Characteristics




Parameter	Units	Min	Typ	Max
Operating Frequency Range	MHz	944		959
Step Size	kHz		5	
Settling Time	msec		10	30
Output Power	dBm	+3.0	+5.0	+7.0
Output Impedance	$\Omega$		50	
Phase Noise	@1kHz offset	dBc/Hz	-78	-73
	@10kHz offset	dBc/Hz	-108	-103
	@100kHz offset	dBc/Hz	-133	-128
	@1MHz offset	dBc/Hz	-152	-147
2nd Harmonic Suppression	dBc		-25	-20
Sideband Spurious Suppression	dBc			-75
Reference	Input Frequency	MHz	5	100
	Input Level	dBm	-5	+5
VCO Power Supply (Vcc)	Voltage	Vdc	5	
	Current	mA	22	30
PLL Power Supply (Vcp)	Voltage	Vdc	5	
	Current	mA	5	10
Operating Temp. Range	$^{\circ}\text{C}$	-40		+85

## Dimensions

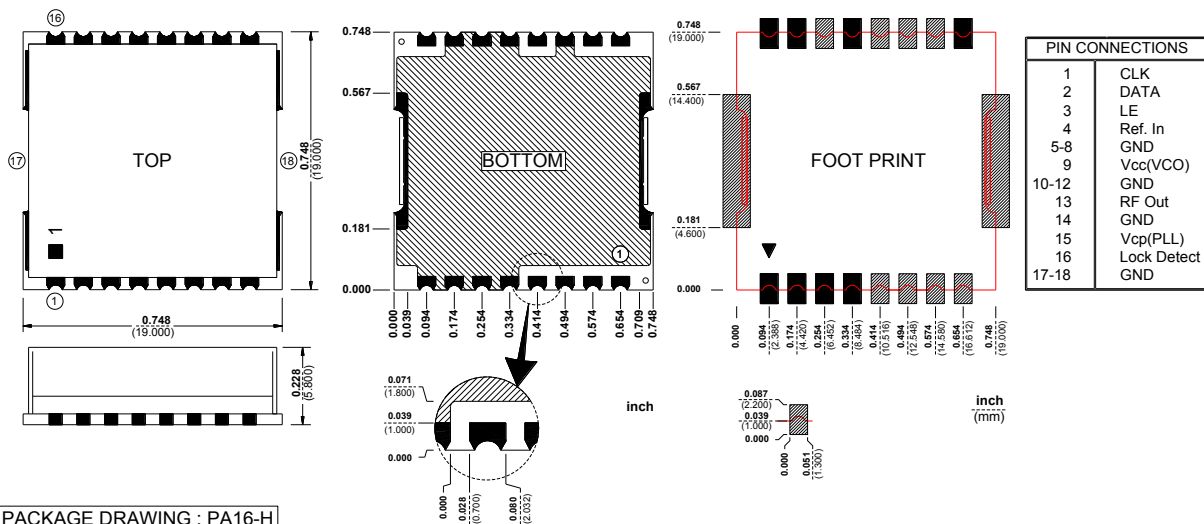

## Harmonic Suppression

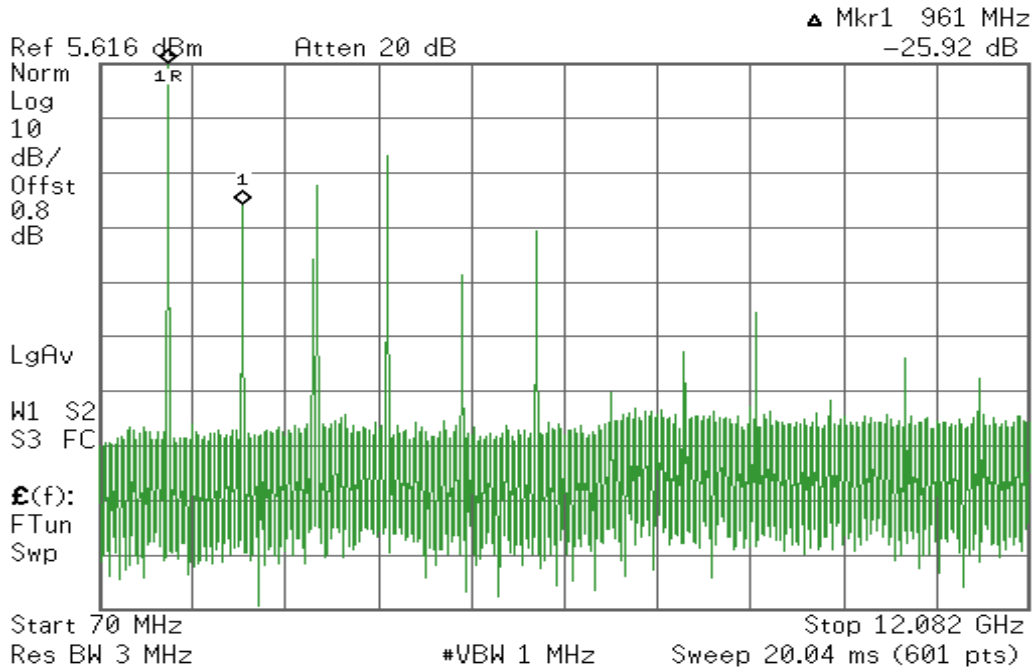

## Sideband Spurious Suppression

