



Model: SR-3000-1S

Description:..... SP1T, Reflective Pin-Switch
Operating Frequency:..... 10 – 3000 MHz
Insertion Loss: 2.0 dB Max
Isolation:

10 - 2000 MHz	2000 - 3000 MHz
65 dB Min	60 dB Max

VSWR (RF Path "ON"):

10 - 20 MHz	20 - 3000 MHz
1.8:1 Max	1.4:1 Max

Rise/Fall time (10% to 90% RF, 90% to 10% RF):... 350 ns Max
On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF):..... 900 ns Max
Operating Power:..... CW / AVG +30 dBm Max
..... Peak: 5W @ 5µS PW Max
Control Input Characteristics: TTL /Unit-Load, Floating-High
Control Logic:..... 1-Control, Logic "0" = RF Path "ON"
Power Supplies:..... +5(±0.25) V @ 50mA Max
..... -12(±0.5) V @ 60mA Max
Connectors (RF):..... SMA (F), Removable
Connectors (Supplies & Controls)..... Solder Pins
Impedance:..... 50 Ohms Nominal
Quality:..... Best-Commercial-Grade

Environmental Ratings:

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity: MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

- A1 [+5(±0.25)V / -5(±0.25)V]
- A2 [+5(±0.25)V / -15(±0.5)V]
- A3 [+12(±0.5)V / -12(±0.5)V]
- A4 [+15(±0.5)V / -15(±0.5)V]

■ **RF Connectors**

- B1 [J1 SMA(M) / J2 SMA(F)]
- B2 [J1 SMA(F) / J2 SMA(M)]
- B3 [All SMA(M)]

■ **Control Connectors**

- C1 [SMC(Jack), 50 Ω]
- C2 [SMB(Jack), 50 Ω]

■ **Control Impedance**

- D1 [50 Ω, Internally Terminated]


■ **Control Function**

- F1 [Inverse Logic, ("1" = Path "ON")]



Model: SR-3000-1S

Outline

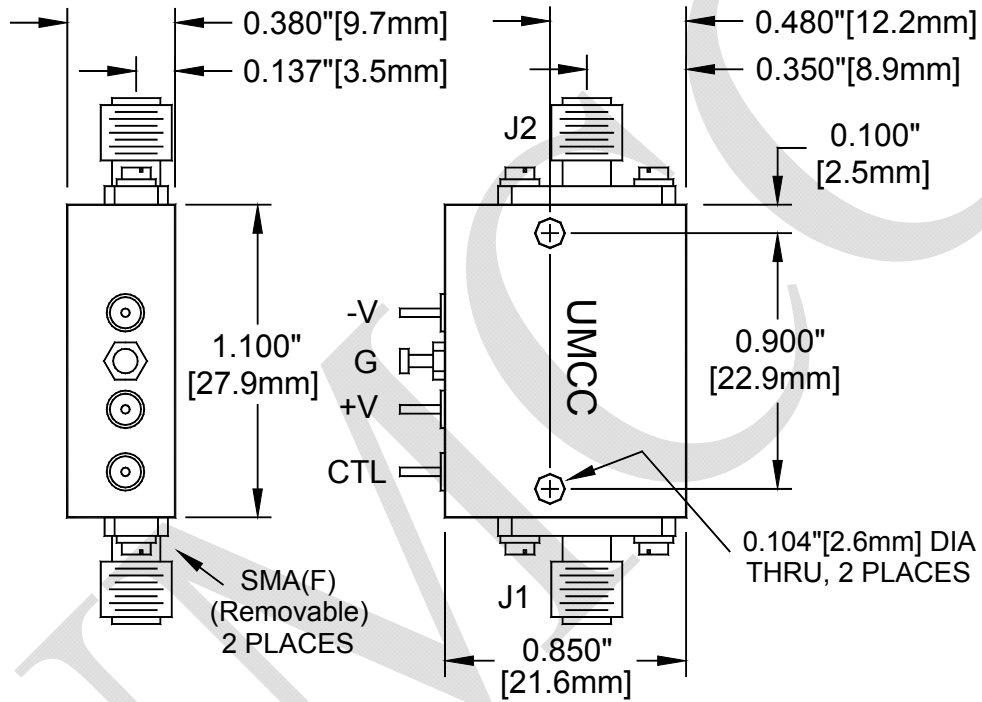

Weight	Tolerances
0.7 oz [19.8g]	±0.015" [±0.38mm]