



6 dB Fixed Attenuator, SMA Female To SMA
Female Rated To 25 Watts Up To 18 GHz

TECHNICAL DATA SHEET

PE7363-6

6 dB Fixed Attenuator, SMA Female To SMA Female Rated To 25 Watts Up To 18 GHz

Configuration

| | |
|---------------------------|-----------------------------------|
| Design | Fixed, Bidirectional Attenuator |
| Connector 1 | SMA Female |
| Connector 2 | SMA Female |
| Body Material and Plating | Aluminum Heatsink, Black Anodized |

Electrical Specifications

| | |
|----------------------------|----------|
| Frequency Range, GHz | DC to 18 |
| Impedance, Ohms | 50 |
| Attenuation Value, dB | 6 to 6 |
| Maximum Input Power, Watts | 25 |
| Maximum VSWR | 1.6:1 |

Frequency 1

| | |
|----------------------------|---------|
| Range, GHz | DC to 6 |
| Insertion Loss, dB | 6 |
| VSWR | 1.3:1 |
| Attenuation Accuracy, dB | 0.5 |
| Maximum Input Power, Watts | 25 |

Frequency 2

| | |
|--------------------------|-----------|
| Range, GHz | 6 to 12.4 |
| VSWR | 1.45:1 |
| Attenuation Accuracy, dB | 0.75 |

Frequency 3

| | |
|--------------------------|------------|
| Range, GHz | 12.4 to 18 |
| VSWR | 1.6:1 |
| Attenuation Accuracy, dB | 1 |

Mechanical Specifications

Temperature

| | |
|------------------------|-------------|
| Operating Range, deg C | -55 to +125 |
|------------------------|-------------|

Size

| | |
|-----------------|--------------|
| Length, in [mm] | 4.5 [114.3] |
| Width, in [mm] | 2.41 [61.21] |
| Weight, lbs [g] | 0.8 [362.87] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 dB Fixed Attenuator, SMA Female To SMA Female Rated To 25 Watts Up To 18 GHz PE7363-6](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





6 dB Fixed Attenuator, SMA Female To SMA Female Rated To 25 Watts Up To 18 GHz

TECHNICAL DATA SHEET

PE7363-6

Connector 1

| | |
|------------------------------------|-----------------------------|
| Type | SMA Female |
| Contact Material and Plating | Beryllium Copper, Gold |
| Contact Plating Specification | Gold |
| Coupling Nut Material and Plating | Stainless Steel, Passivated |
| Coupling Nut Plating Specification | Stainless Steel |
| Hex Size, In. | 11/16 |
| Body Material and Plating | Stainless Steel, Passivated |
| Body Plating Specification | Passivated |

Connector 2

| | |
|--------------------------------------|-----------------------------|
| Type | SMA Female |
| Contact Material and Plating | Beryllium Copper, Gold |
| Outer Conductor Material and Plating | Stainless Steel, Passivated |
| Hex Size, In. | 11/16 |
| Body Material and Plating | Stainless Steel, Passivated |

Compliance Certifications (visit www.Pasternack.com for current document)

| | |
|----------------|-----|
| RoHS Compliant | Yes |
|----------------|-----|

Plotted and Other Data

| | |
|--------|----------------------------|
| Notes: | Values at 25 °C, sea level |
|--------|----------------------------|

URL: <http://www.pasternack.com/6db-fixed-sma-female-sma-female-25-watts-attenuator-pe7363-6-p.aspx>

6 dB Fixed Attenuator, SMA Female To SMA Female Rated To 25 Watts Up To 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.




PE7363-6 CAD Drawing

6 dB Fixed Attenuator, SMA Female To SMA Female Rated To 25 Watts Up To 18 GHz

| xx | Input Connector | Output Connector |
|-----|-----------------------------|------------------|
| 55 | SMA Male | 7/16 Female |
| 56 | SMA Male | N Female |
| 57 | SMA Male | SMA Female |
| 58 | SMA Male | TNC Female |
| 59 | SMA Female | 7/16 Female |
| 60 | SMA Female | 7/16 Male |
| 61 | SMA Female | N Female |
| 62 | SMA Female | N Male |
| 63 | SMA Female | SMA Female |
| 64 | SMA Female | TNC Female |
| 65 | SMA Female | TNC Male |
| 66 | N Male | 7/16 Female |
| 67 | N Male | N Female |
| 68 | N Male | TNC Female |
| 69 | N Female | 7/16 Female |
| 70 | N Female | 7/16 Male |
| 71 | N Female | N Female |
| 72 | N Female | TNC Female |
| 73 | N Female | TNC Male |
| 74 | TNC Male | TNC Female |
| 75 | TNC Male | SMA Male |
| 76 | TNC Female | 7/16 Female |
| 77 | TNC Female | 7/16 Male |
| 78 | TNC Female | TNC Female |
| 79 | 7/16 Male | 7/16 Female |
| 80 | 7/16 Female | 7/16 Female |
| -yy | Indicates Attenuation Level | |

| Connector Type | DIM "A" (REF.) |
|----------------|----------------|
| SMA Male | 0.68 |
| SMA Female | 0.54 |
| TNC Male | 0.98 |
| TNC Female | 0.94 |
| N Female | 0.95 |
| N Male | 0.98 |
| 7/16 Male | 1.12 |
| 7/16 Female | 1.16 |

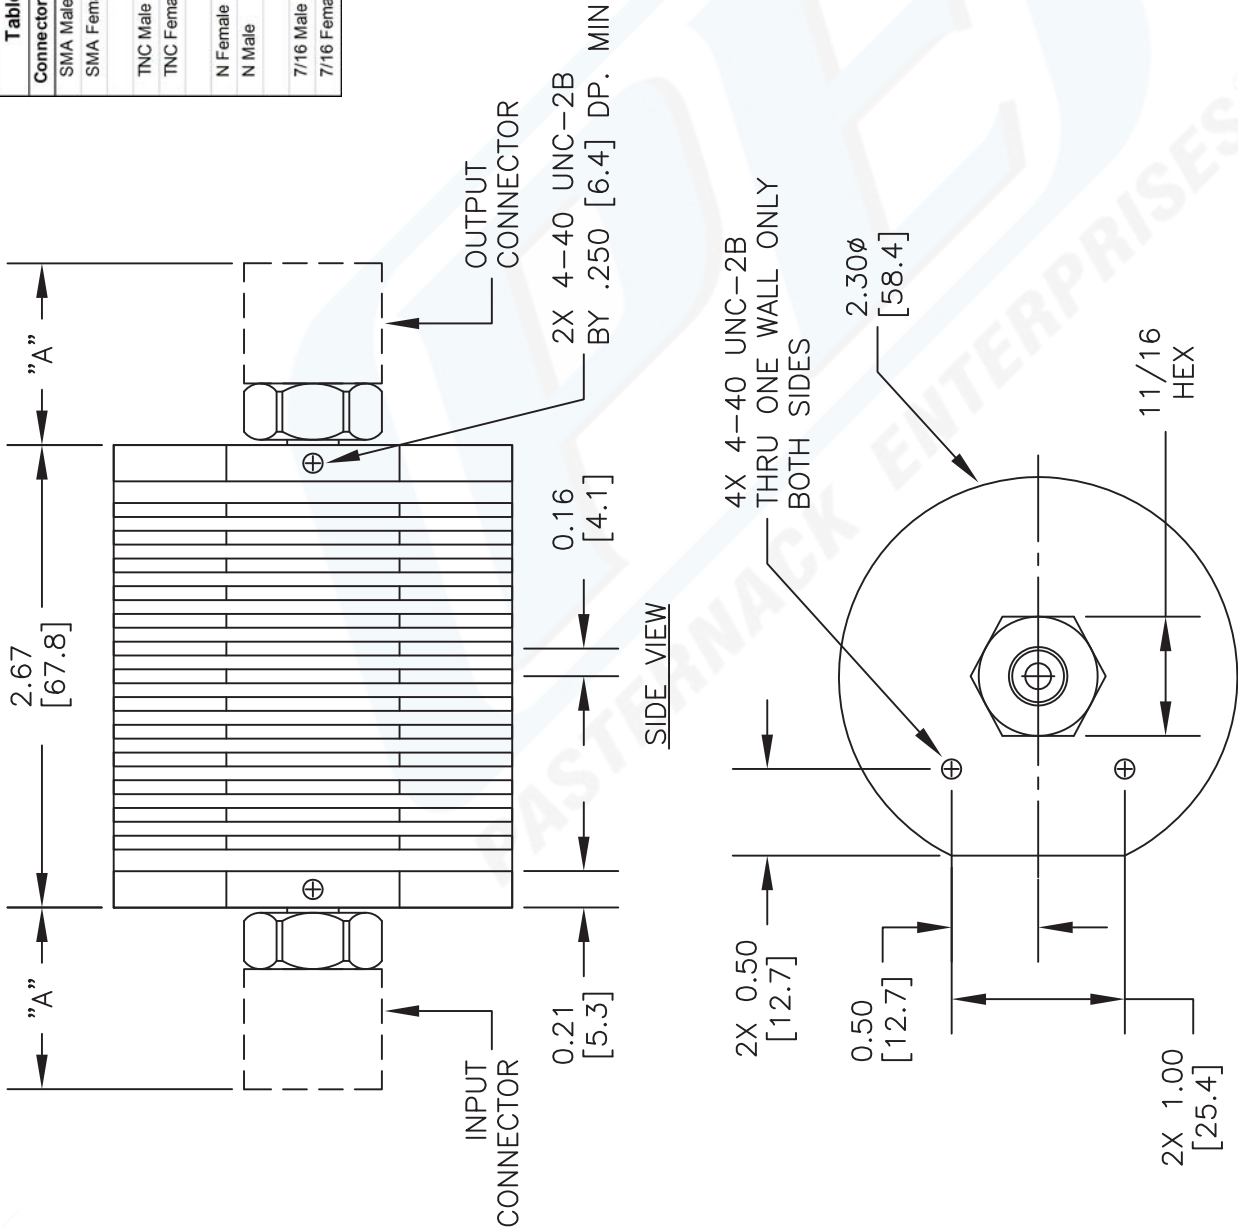

DWG TITLE

PE73xx-yy

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

PE PASTERNAK
 Pasternack Enterprises, Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 102512

SCALE N/A

SIZE A

2233