

## Features

- Ultra low noise
- Linear tuning characteristics
- Low pushing / Low pulling

## Applications


- SATCOM
- Receiver
- Test Equipment
- Radar
- Point-to-Point
- Radio
- MMDS
- WiMax

## Electrical Characteristics



Parameter	Units	Min	Typ	Max
Operating Frequency Range	MHz	2100		2500
Output Power	dBm		7.0	
Output Impedance	$\Omega$		50	
Phase Noise	@10kHz offset	dBc/Hz	-106	
	@100kHz offset	dBc/Hz	-126	
Tuning Voltage (Vt)	Vdc	0		+15
Tuning Voltage Sensitivity (Kv)	MHz/V		33	
2nd Harmonic Suppression	dBc		-20	
Power Supply (Vcc)	Voltage	Vdc	6	
	Current	mA	27	
Pushing Figure	MHz/V		1	
Pulling Figure	MHz		2	
Input Capacitance	pF		18	
Operating Temp. Range	$^{\circ}\text{C}$	-40		+85

## Dimensions

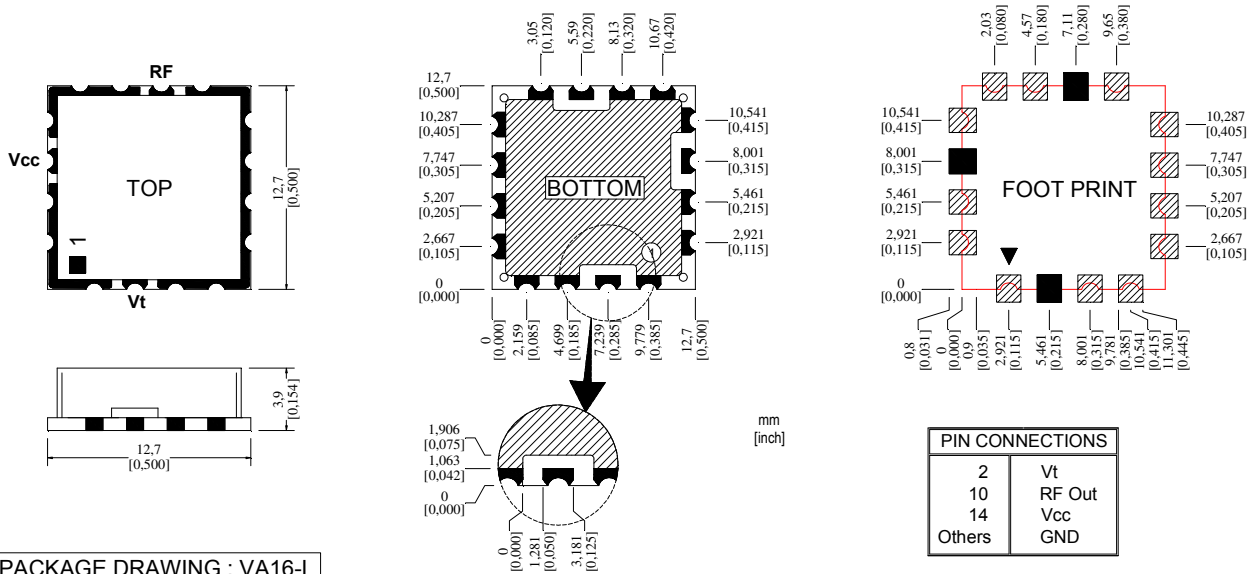

PACKAGE DRAWING : VA16-L