

OUTPUT**Frequency**

400 MHz

Level

+13 dBm ± 2dB into 50 ohms

G*: +13 dBm ±3 dB into 50 ohms

STABILITY**Aging (typical)**1 x 10⁻⁶ per year after 30 days operating5 x 10⁻⁷ second year3 x 10⁻⁷ per year, thereafter**Phase Noise L(f)**

	Standard	Premium
100 Hz	-107 dBc/Hz	-117 dBc/Hz
1 kHz	-137 dBc/Hz	-142 dBc/Hz
10 kHz	-152 dBc/Hz	-152 dBc/Hz
100 kHz	-152 dBc/Hz	-154 dBc/Hz

Temperature StabilityE: ±2 x 10⁻⁷, 0° to +50°C (Ref +25°C)F: ±5 x 10⁻⁷, -20 to +70°C (Ref +25°C)G*: ±2 x 10⁻⁶, -55° to +85°C (Ref +25°C)**Harmonics**

≤ -30 dBc

Sub-Harmonics

≤ -50 dBc

Spurious

≤ -80 dBc, excluding power supply line related spurs

MECHANICAL**Packaging**

Solder sealed steel can

Dimensions

2 x 2 x 0.75"

Connectors / Mounting

Package A: SMA(f) and solder pins on side; threaded inserts, #4-40, 2 places

Package B: Solder pins on base; Thru hole PCB Mount

POWER REQUIREMENTS**Warm-Up Power**

≤ 6 Watts for 5 minutes at +25°C

G*: ≤ 7 Watts for 5 minutes at +25°C

Total Power

≤ 4 Watts at +25°C

G*: ≤ 5 Watts at +25°C

Supply Voltage

+15 VDC ±5% or +12 VDC ±5%

ADJUSTMENT

(consult factory for non-standard tuning options)

Mechanical Tuning±4 x 10⁻⁶**Electrical Tuning**±5 x 10⁻⁷, ±5 VDC

Negative slope

CRYSTAL**Type**

100 MHz SC-cut (x4)

REV	DATE	REVISION RECORD	DWN	AUTH
-	11-27-13	Initial Release	CB	

Ordering Options

-XX	Voltage	Phase Noise L(f)	Package	Temp (Ref +25°C)
01	+15V	Standard	A	E
02	+15V	Standard	A	F
03	+15V	Standard	A	G
04	+15V	Standard	B	E
05	+15V	Standard	B	F
06	+15V	Standard	B	G
11	+15V	Premium	A	E
12	+15V	Premium	A	F
13	+15V	Premium	A	G
14	+15V	Premium	B	E
15	+15V	Premium	B	F
16	+15V	Premium	B	G
21	+12V	Standard	A	E
22	+12V	Standard	A	F
23	+12V	Standard	A	G
24	+12V	Standard	B	E
25	+12V	Standard	B	F
26	+12V	Standard	B	G
31	+12V	Premium	A	E
32	+12V	Premium	A	F
33	+12V	Premium	A	G
34	+12V	Premium	B	E
35	+12V	Premium	B	F
36	+12V	Premium	B	G

**Wenzel Associates, Inc.**


Austin, Texas

Title:

400 MHz-SC Sprinter Crystal Oscillator


P/N: 501-27583-xx	Rev: -	Date: 11-27-13	Drawn:	Ref:
Tolerances: (except as noted) Dimensions are in inches	0.XX Dec: ±0.030"	0.XXX Dec: ±0.010"	FSCM: 62821	Page 1 of 2

Package A

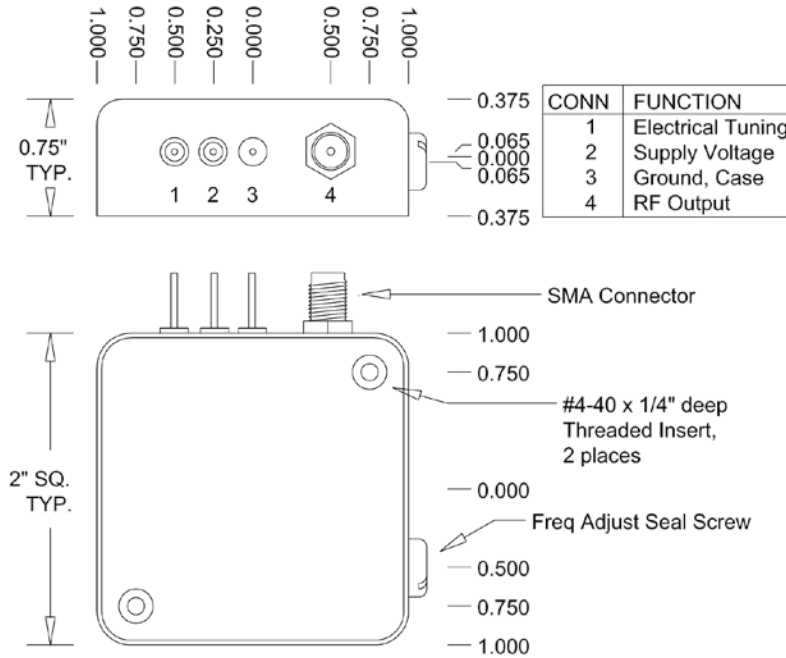

Connector numbers are for reference only, they are not marked on unit.

Package B

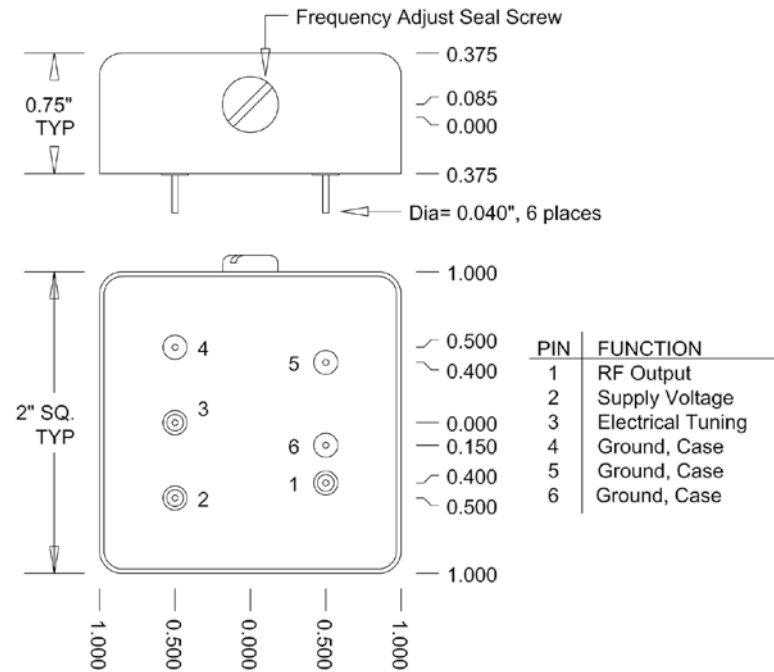

Connector numbers are for reference only, they are not marked on unit.

Wenzel Associates, Inc.

Austin, Texas

Title: **400 MHz-SC Sprinter Crystal Oscillator**

P/N: **501-27583-xx** Rev: **-** Date: **11-27-13** Drawn: Ref:

Tolerances: (except as noted) Dimensions are in inches 0.XX Dec: **±0.030"** 0.XXX Dec: **±0.010"** FSCM: **62821** Page 2 of 2