

Surface Mount Bandpass Filter

TBP-154+

50Ω 136 to 175 MHz

The Big Deal

- Small size (0.25" x 0.25" x 0.10")
- High rejection
- Flat group delay, 17 ns typical
- Broad band filter (fractional bandwidth of 25%)
- Miniature shielded package



CASE STYLE: GQ1018

Product Overview

The TBP-154+ is a broad-band bandpass filter in a shielded package (size of 0.25" x 0.25" x .10") fabricated using SMT technology. These units offer good matching within the passband and high rejection. In addition it has repeatable performance across production lots and consistent performance across temperature.

Key Features

Feature	Advantages
Sharp shape factor	Sharp shape factor helps in adjacent rejection and increased selectivity.
High rejection	Achieving 70dB rejection at 700MHz; the TBP-154+ provides a versatile anti aliasing solution for high data rate receivers.
Flat group delay characteristics	The model has a group delay flatness of 17 ns which helps in reducing the signal distortion.
Shielded case	Reduced interference with the surrounding components.



For detailed performance specs
& shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Surface Mount Bandpass Filter

50Ω 136 to 175 MHz

TBP-154+



CASE STYLE: GQ1018
PRICE: \$23.95 ea. QTY (1-9)

Features

- High rejection
- Flat group delay, 17 ns typical over passband
- Small size 0.25" x 0.25" x 0.10"
- Aqueous washable
- Miniature shielded package

Applications

- Harmonic rejection
- Transmitters / receivers
- Public safety radio

Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	—	—	154	—	MHz	
	Insertion Loss	F1-F2	136-175	—	3.2	4.0	dB
	VSWR	F1-F2	136-175	—	1.8	2.5	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC-108	20	28	—	dB
	VSWR	DC-F3	DC-108	—	37	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	220-3000	20	27	—	dB
	VSWR	F4-F5	220-3000	—	11	—	:1

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	100mW max.

Permanent damage may occur if any of these limits are exceeded.

Functional Schematic

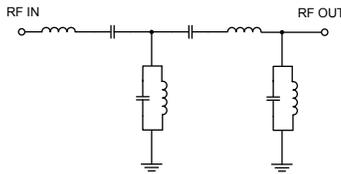

Typical Frequency Response




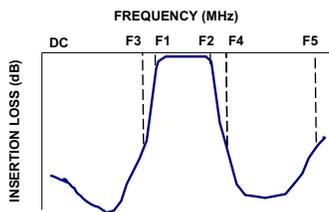


Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
0.5	96.94	434.30	136	23.63
40.0	86.62	347.44	137	22.62
85.0	48.57	157.93	138	21.69
108.0	28.55	43.44	140	20.11
120.0	15.75	15.00	141	19.44
126.0	8.83	6.21	142	18.87
130.0	5.32	3.24	146	17.23
136.0	3.22	1.96	150	16.24
154.0	2.40	1.62	152	15.90
156.0	2.35	1.62	154	15.64
175.0	2.55	1.34	156	15.48
179.0	2.96	1.35	158	15.41
186.0	7.45	2.79	160	15.39
190.0	10.45	4.86	162	15.42
194.0	13.53	7.97	164	15.50
220.0	27.71	35.46	166	15.63
320.0	51.79	124.09	168	15.81
500.0	62.76	193.02	172	16.49
1000.0	57.17	133.63	174	17.05
3000.0	37.09	27.59	175	17.41

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

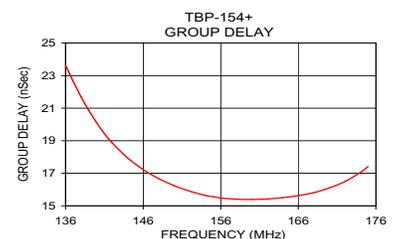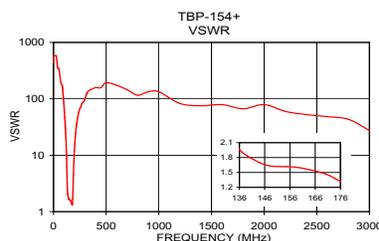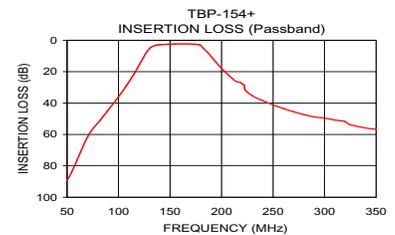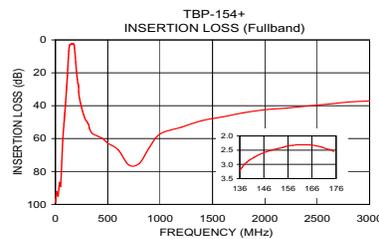

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site


Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M130740
TBP-154+
EDR-8859/1U
RAV/URJ/NY
110722page
2 of 3

Pad Connections

INPUT	4
OUTPUT	8
NOT CONNECTED	2
GROUND	1,3,5,6,7



Demo Board MCL P/N: TB-540+
Suggested PCB Layout (PL-310)

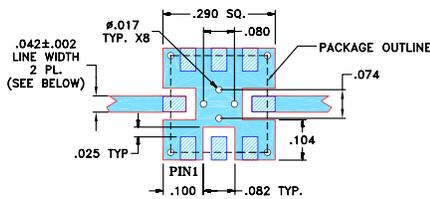


- NOTES:**
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020"±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Outline Drawing

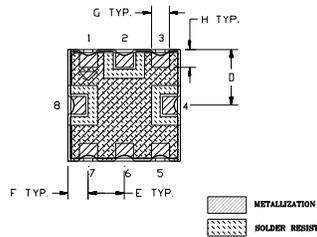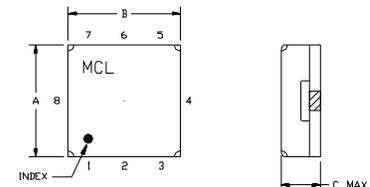

PCB Land Pattern

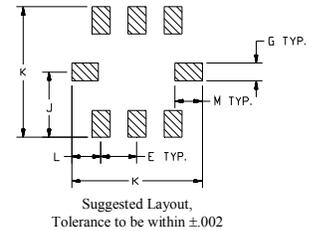

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G
.25	.25	.10	.065	.080	.045	.040
6.35	6.35	2.54	1.65	2.03	1.14	1.02
H	J	K	L	M	wt	
.040	.145	.290	.065	.060	grams	
1.02	3.68	7.37	1.65	1.52	0.25	