


Features

- 3 wire serial integer PLL
- Compact Size 0.75"x0.75"x0.23"
- Low phase noise
- Programming : LMX2326(NSC)

Applications

- Broadcast
- VHF radio
- Wireless Telemetry
- Test Instrument - Signal Generation

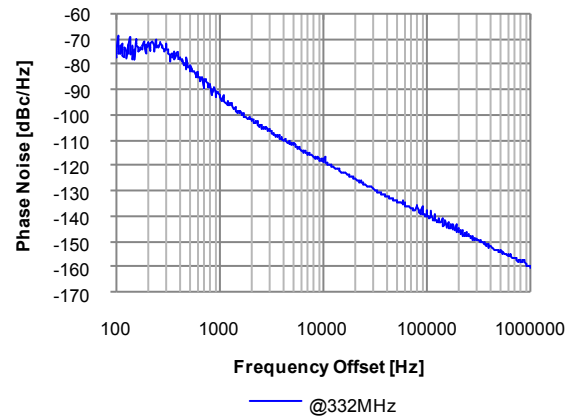


Electrical Characteristics




Parameter	Units	Min	Typ	Max
Operating Frequency Range	MHz	328		336
Step Size	kHz		10	
Settling Time	msec		10	30
Output Power	dBm	+3.0	+5.0	+7.0
Output Impedance	Ω		50	
Phase Noise	@1kHz offset	dBc/Hz	-90	-85
	@10kHz offset	dBc/Hz	-117	-112
	@100kHz offset	dBc/Hz	-138	-133
	@1MHz offset	dBc/Hz	-158	-153
2nd Harmonic Suppression	dBc		-26	-20
Sideband Spurious Suppression	dBc			-80
Reference	Input Frequency	MHz	5	100
	Input Level	dBm	-5	+5
VCO Power Supply (Vcc)	Voltage	Vdc	5	
	Current	mA	21	30
PLL Power Supply (Vcp)	Voltage	Vdc	5	
	Current	mA	5	10
Operating Temp. Range	$^{\circ}\text{C}$	-40		+85

Dimensions

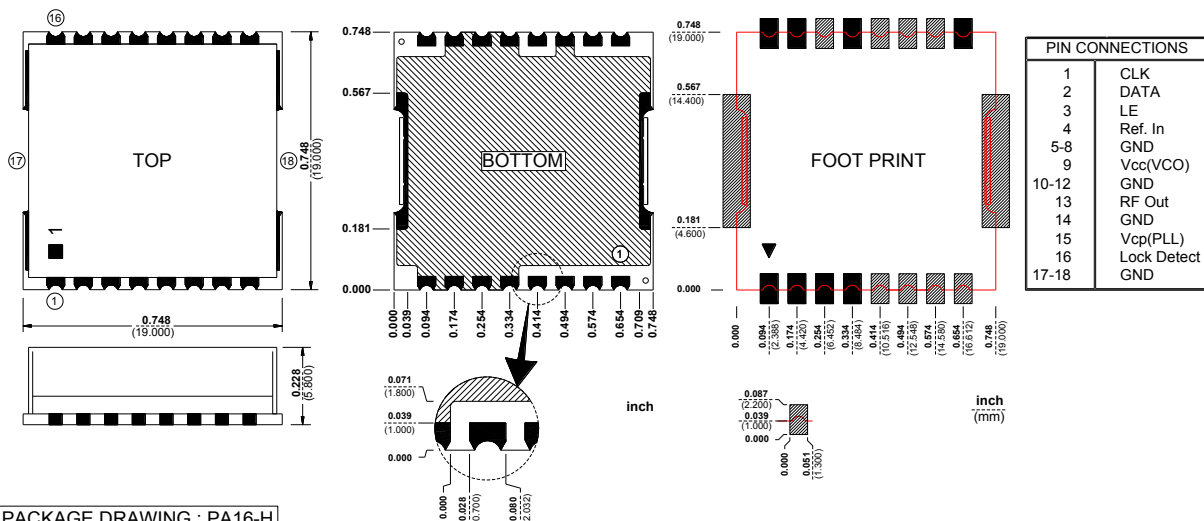

Harmonic Suppression

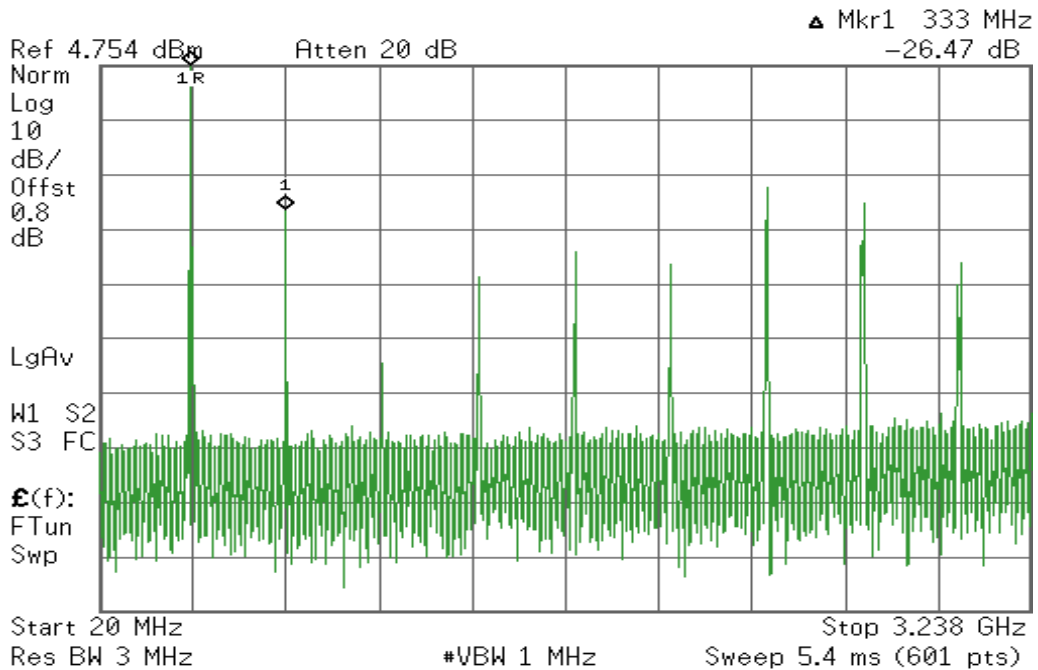

Sideband Spurious Suppression

