

Voltage Controlled Oscillator

RS3698AM

Rev. A

Optimized Band 3620 to 3775 MHz

Features

- Low phase noise
- Linear tuning characteristics
- Low pushing / Low pulling
- Aqueous washable

Applications


- SATCOM
- Receiver
- Test Equipment
- Radar
- Point-to-Point
- Radio
- MMDS
- WiMax

Electrical Characteristics



Parameter	Units	Min	Typ	Max
Operating Frequency Range	MHz	3620		3775
Output Power	dBm		0.0	
Output Impedance	Ω		50	
Phase Noise	@10kHz offset		-95	
	@100kHz offset		-115	
Tuning Voltage (Vt)	Vdc	+0.5		+4.5
Tuning Voltage Sensitivity (Kv)	MHz/V		54	
2nd Harmonic Suppression	dBc		-15	
Power Supply (Vcc)	Voltage	Vdc	5	
	Current	mA	29	
Pushing Figure	MHz/V		3	
Pulling Figure	MHz		7	
Input Capacitance	pF		18	
Operating Temp. Range	°C	-40		+85

Dimensions

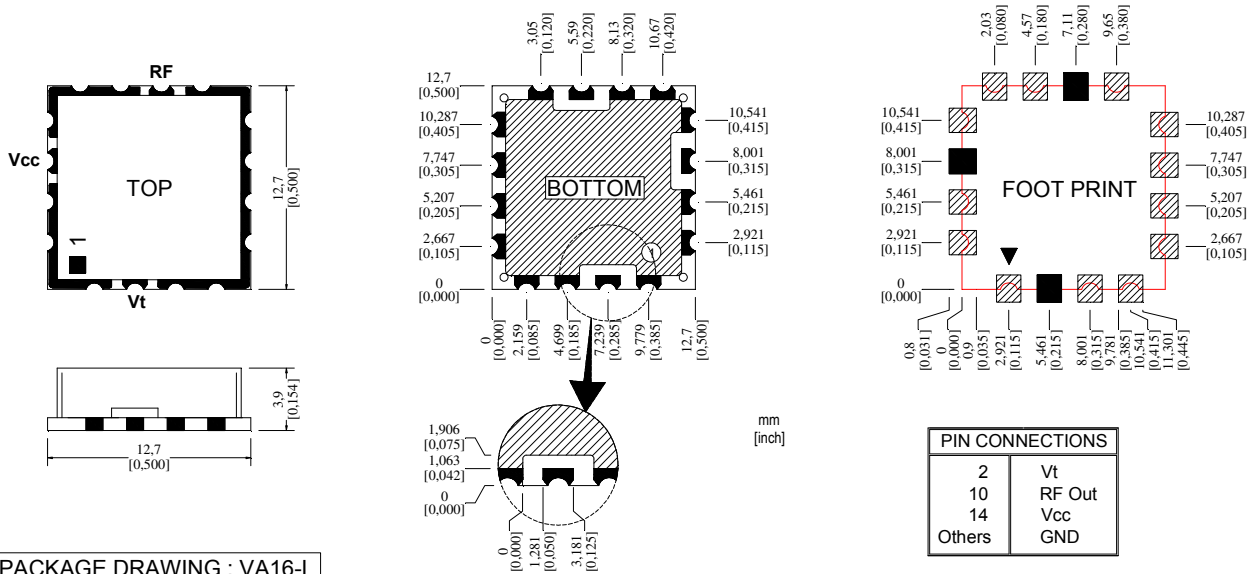

PACKAGE DRAWING : VA16-L