


Features

- 3 wire serial integer PLL
- Small Size 0.55"x0.57"x0.13"
- Low phase noise
- Programming : LMX2326(NSC)

Applications

- Broadcast
- VHF radio
- Wireless Telemetry
- Test Instrument - Signal Generation

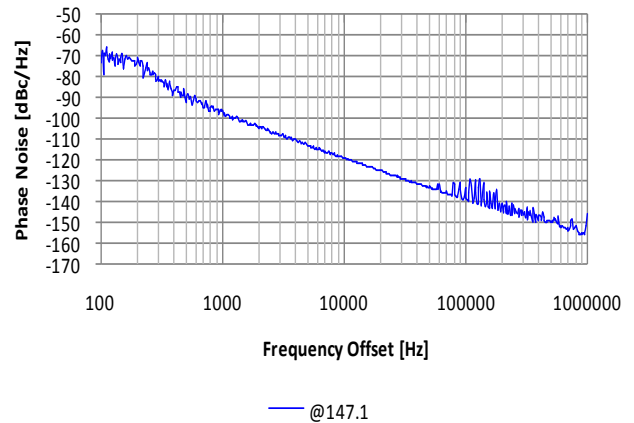


Electrical Characteristics




Parameter	Units	Min	Typ	Max
Operating Frequency Range	MHz		147.10	
Step Size	kHz		10	
Settling Time	msec		10	30
Output Power	dBm	-2.0	0.0	+2.0
Output Impedance	Ω		50	
Phase Noise	@1kHz offset	dBc/Hz	-96	-91
	@10kHz offset	dBc/Hz	-118	-113
	@100kHz offset	dBc/Hz	-130	-125
	@1MHz offset	dBc/Hz	-150	-145
2nd Harmonic Suppression	dBc		-24	-15
Sideband Spurious Suppression	dBc			-70
Reference	Input Frequency	MHz	5	100
	Input Level	dBm	-5	+5
VCO Power Supply (Vcc)	Voltage	Vdc	5	
	Current	mA	25	30
PLL Power Supply (Vcp)	Voltage	Vdc	5	
	Current	mA	5	10
Operating Temp. Range	$^{\circ}\text{C}$	-40		+85

Dimensions

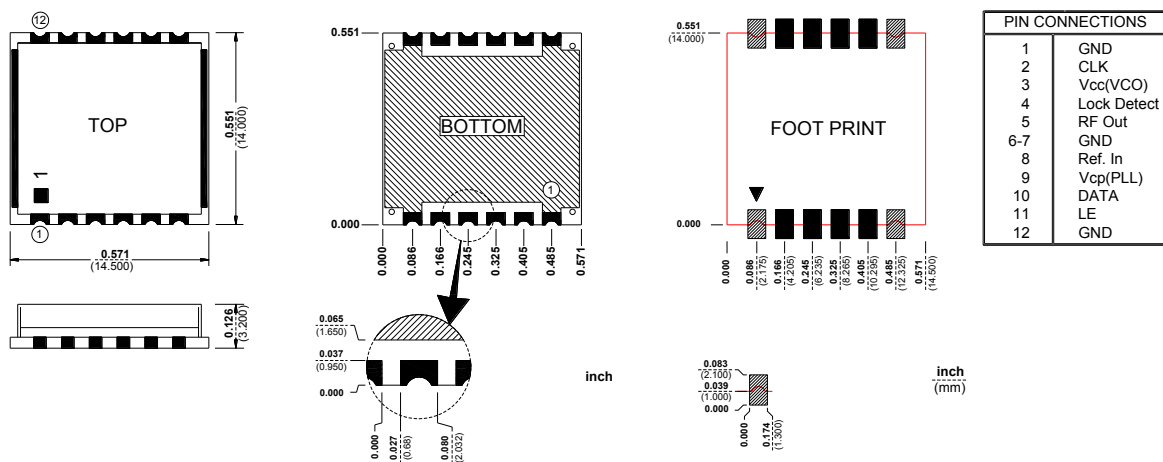

PACKAGE DRAWING : PM12-L

Harmonic Suppression

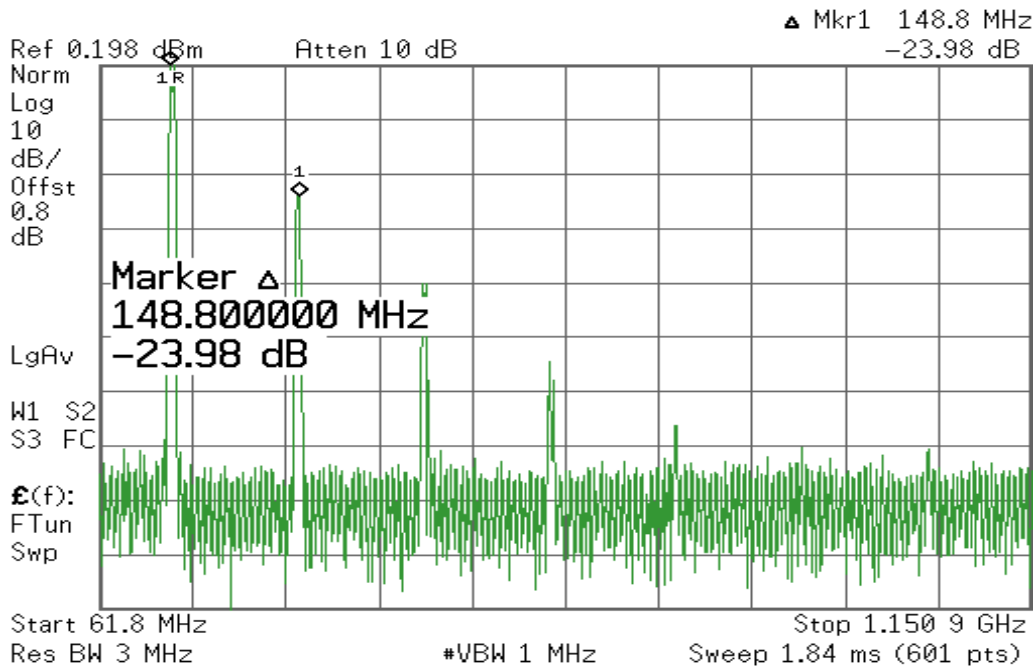

Sideband Spurious Suppression

