


- **Designed for SDARS Receiver IF Application**
- **Low Insertion Loss**
- **3.8 X 3.8 mm Surface-Mount Case**
- **Differential Input and Output**
- **Complies with Directive 2002/95/EC (RoHS)**



SF2025D

259.861 MHz
SAW Filter



SM3838-8

Absolute Maximum Ratings

Rating	Value	Units
Maximum Incident Power in Passband	+10	dBm
Max. DC voltage between any 2 terminals	30	VDC
Storage Temperature Range	-40 to +105	°C
Suitable for lead-free soldering - Max Soldering Temperature	260°C for 30 s	

Characteristic	Sym	Notes	Min	Typ	Max	Units	
Nominal Center Frequency	f_c			259.861		MHz	
Passband	IL	1			16	18	dB
			Minimum Insertion Loss				
				13.6		MHz	
				14.3			
		1, 2		0.5	1	dB _{p-p}	
				0.5	1.5		
				0.5	1		
				0.5	1		
				0.5	1		
				0.5	1		
				0.5	1		
				0.5	1		
				0.5	1.15		
				90	120	ns _{p-p}	
				60	120		
Rejection		1, 2, 3	fc-28 to fc-12 MHz and fc+12 to fc+33 MHz	36	43	dB	
			fc-12 to fc-10.5 MHz	30	40		
			fc+9 to fc+12 MHz	26	36		
Operating Temperature Range	T_A	1	-40		+85	°C	
Frequency Temperature Coefficient				-18		ppm/°C	
Differential Input and Output Impedance	L & C Match to 150 ohms						
Case Style		7	SM3838-8 3.8 x 3.8 mm Nominal Footprint				
Lid Symbolization (YY=year, WW=week, S=shift)			634 YYWW				



NOTES:

1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
 2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, f_c .
 3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
 4. The design, manufacturing process, and specifications of this filter are subject to change.
 5. Tape and Reel Standard Per ANSI / EIA 481.
 6. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
 7. US and international patents may apply.
 8. Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd.
- Electrostatic Sensitive Device. Observe precautions for handling.






400-1724-001	PCB, 4 PORT, 3X3MM	PCB
SF2025D	FILTER, 259.861 MHZ	FILTER
501-0857-056	CAP, 5.6 PF, 0402CS	C1,C2
501-0857-050	CAP, 5.0 PF, 0402CS	C3,C4
501-0857-010	CAP, 1.0 PF, 0402CS	C5
500-1282-390	IND, 39 NH, 0402CS	L1 COILCRAFT
500-1282-510	IND, 51 NH, 0402CS	L2 COILCRAFT

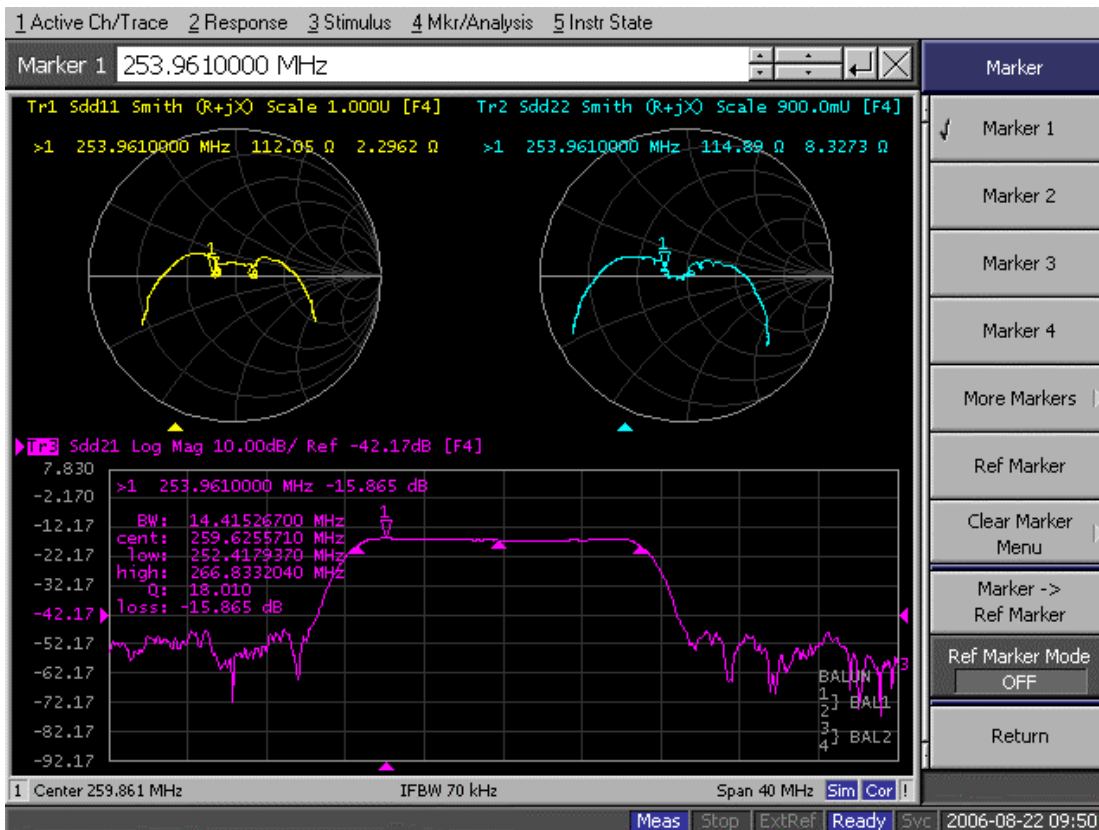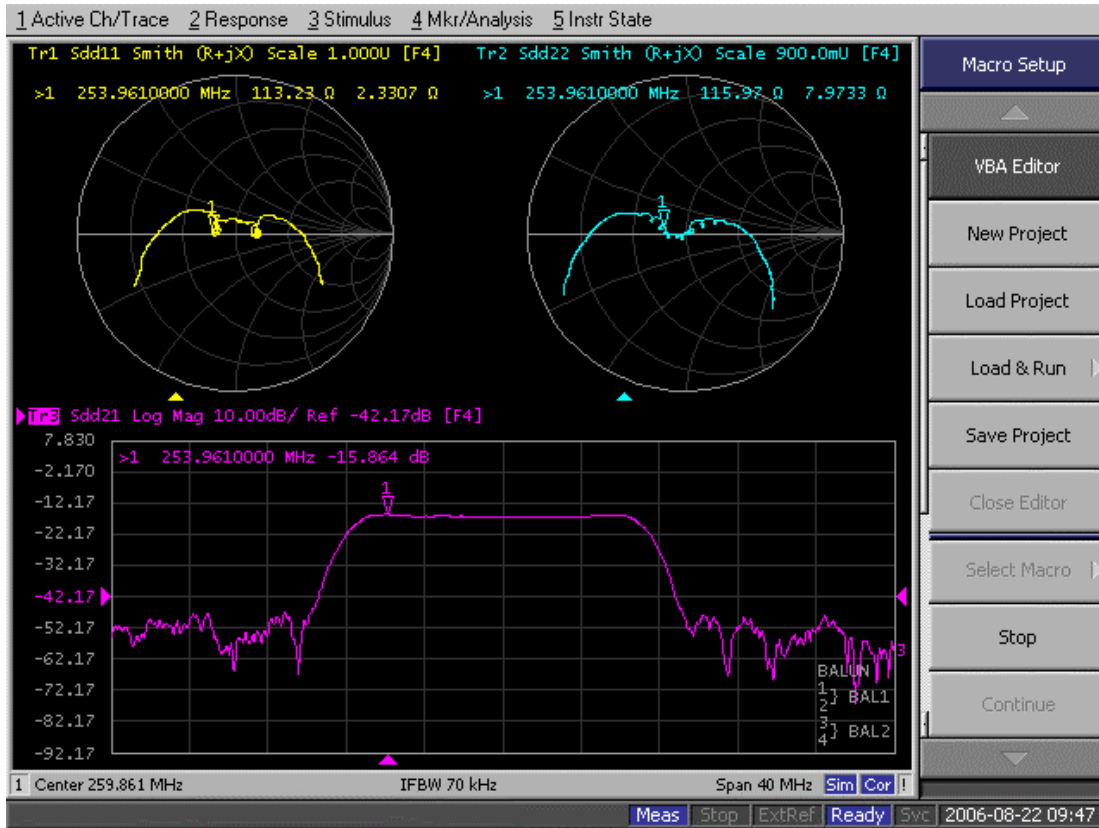

SM3838-8 Case

8-Terminal Ceramic Surface-Mount Case

3.8 X 3.8 mm Nominal Footprint

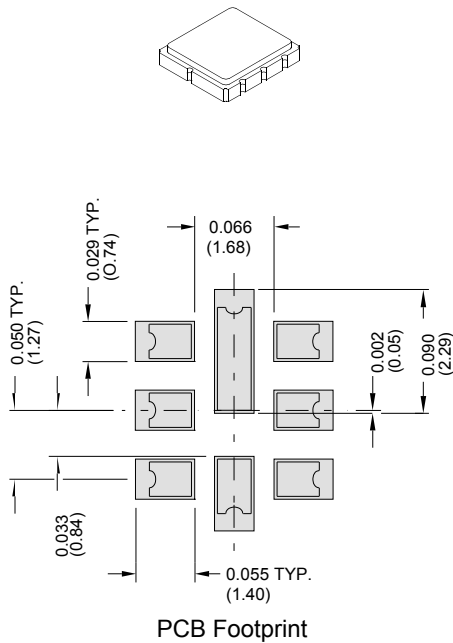


Dimension	Case Dimensions					
	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	3.6	3.8	4.0	0.142	0.150	0.157
B	3.6	3.8	4.0	0.142	0.150	0.157
C	0.95	1.10	1.25	0.037	0.043	0.049
D	0.60	0.85	1.00	0.023	0.033	0.039
E	0.90	1.00	1.10	0.035	0.040	0.043
F	0.50	0.60	0.70	0.020	0.024	0.028
G	2.39	2.54	2.69	0.090	0.100	0.110
H	1.35	1.5	1.65	0.053	0.059	0.065

Electrical Connections		
	Connection	Terminals
Port 1	Differential Input	1, 2
Port 2	Differential Output	5, 6
	Ground	All Others
Single Ended Operation		Return is Ground
Differential Operation		Return is Hot
Dot Indicates Pin 1		


Materials	
Solder Pad Termination	Au plating 30 - 60 ulnches (76.2-152 uM) over 80-200 ulnches (203-508 uM) Ni.
Lid	Fe-Ni-Co Alloy Electroless Nickel Plate (8-11% Phosphorus) 100-200 ulnches Thick
Body	Al ₂ O ₃ Ceramic
Pb Free	

TOP VIEW


BOTTOM VIEW

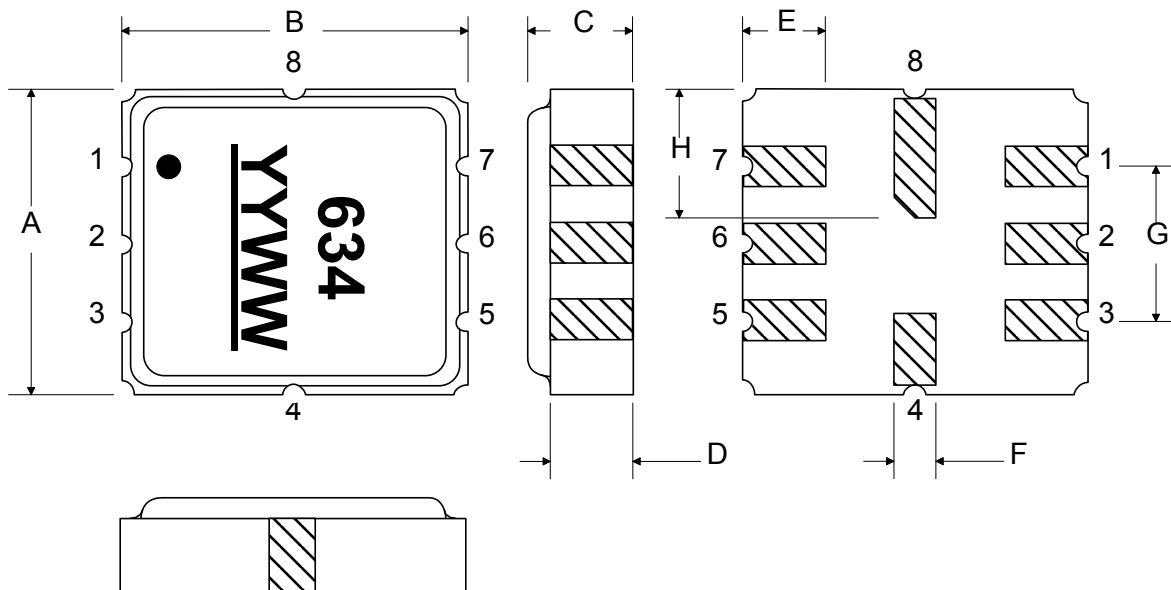

Tape and Reel Specifications

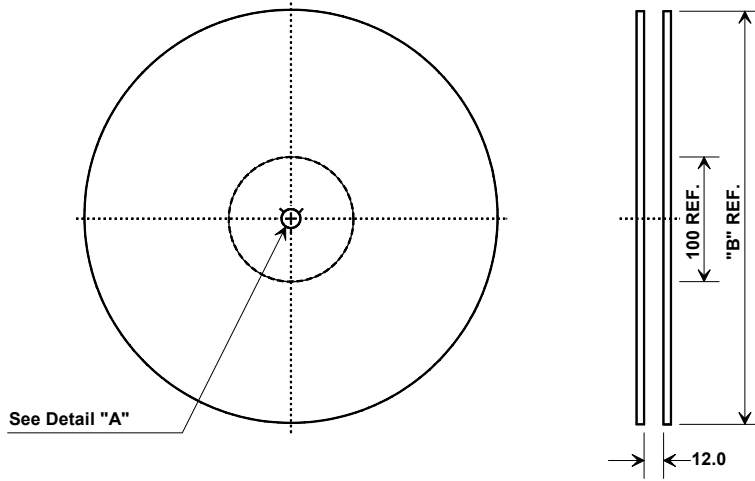

"B" Nominal Size		Quantity Per Reel
Inches	millimeters	
7	178	1000
13	330	3000



COMPONENT ORIENTATION and DIMENSIONS

Carrier Tape Dimensions	
Ao	4.25 mm
Bo	4.25 mm
Ko	1.60 mm
Pitch	8.0 mm
W	12.0 mm

