



# RF-LAMBDA

The power beyond expectations

RFLT2W0502G






## Wide Band Power Divider

- Very small package
- Excellent phase and amplitude balance
- Bi-Directional as divider and combiner \*
- Low Insertion loss and high isolation
- Standard: MIL E-5400, MIL E -16400
- High power handling capability

\* 3W maximum input when work as combiner.

### Electrical Specifications:

Center Frequency Range:	500MHz-2000MHz
Insertion Loss:	0.5dB
Amplitude Unbalance:	0.2dB
Phase unbalance:	2.0 degree
Isolation:	20dB
VSWR:	1.25
Temp. Range:	-10°C~+70°C
Forward Power Handling:	20W (CW)
Reverse Power Handling:	3W (CW)
Connector:	SMA-F
Finishing:	Black Paint and Epoxy cover

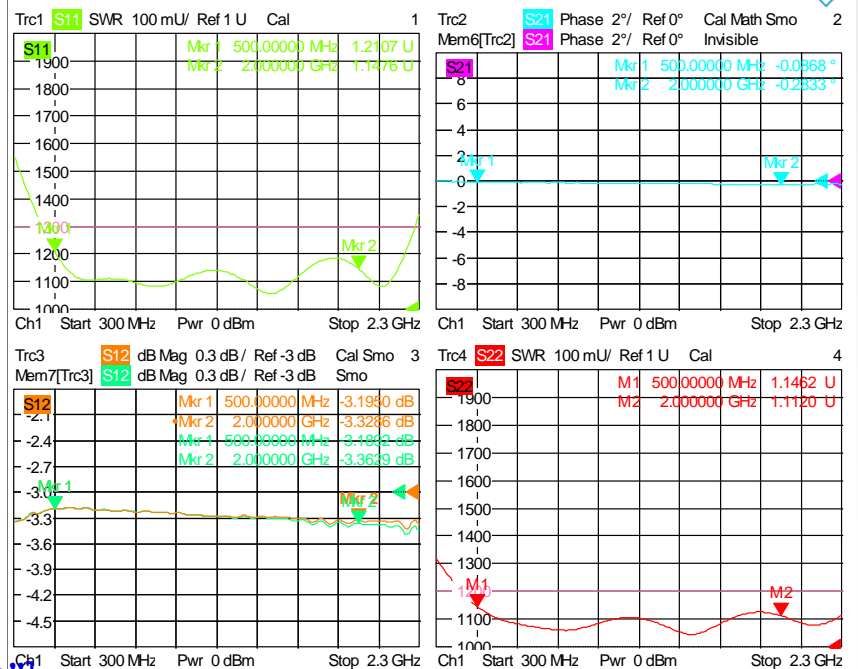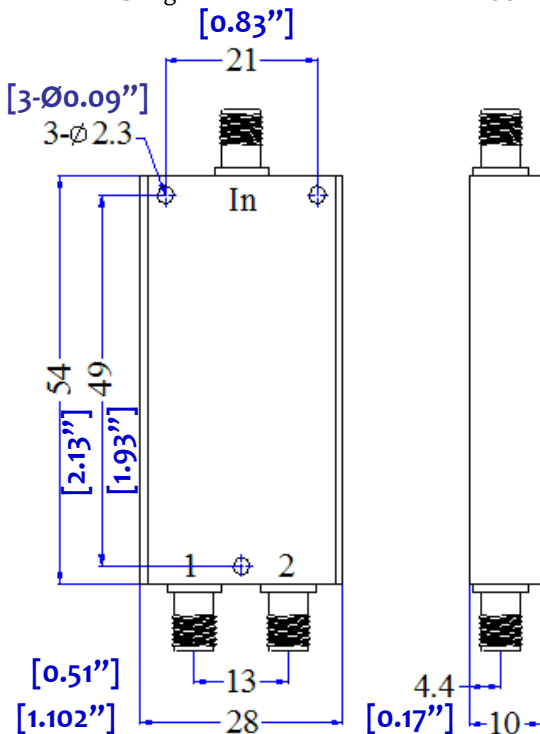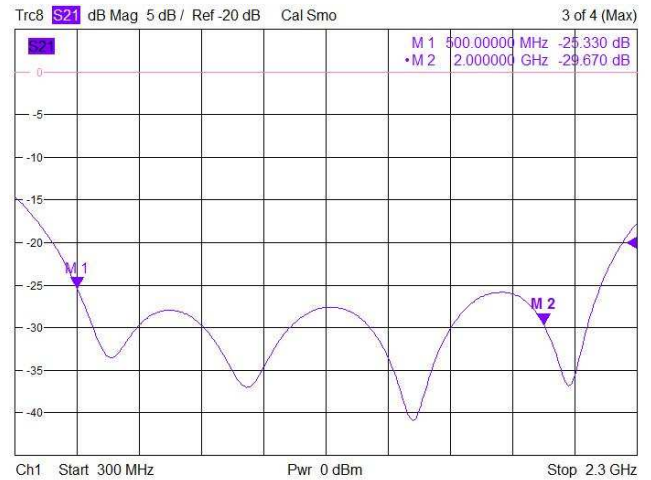

500MHz-2000MHz 2-Way Power Divider

3/21/2011, 10:05 PM