

Terminations & Loads



Model 1453 Medium Power, N Connectors

dc to 8.5 GHz
10 Watts



Features

- /// Optimized for Wireless OEM and Test Applications.
- /// Designed to meet environmental requirements of MIL-D-39030.
- /// Quality Injection Molded Connector.

Specifications

NOMINAL IMPEDANCE: 50 Ω

FREQUENCY RANGE: dc to 8.5 GHz

MAXIMUM SWR:	
Frequency (GHz)	SWR
dc - 4	1.15
4 - 8.5	1.25

POWER RATING: 10 watts **average (mounted horizontally)** @ 25°C ambient temperature, derated linearly to 1 watt @ 125°C. 1 kilowatt **peak** (5 μsec pulse width; 0.5% duty cycle).

TEMPERATURE RANGE: -55°C to +125°C


TEST DATA: Swept data plots of SWR from 50 MHz to 12.4 GHz is available at additional cost.

CONNECTOR: Type N connector per MIL-STD-348 interface dimensions - mate nondestructively with MIL-C-39012 connector. Choice of male (-4) or female connector (-3).

CONSTRUCTION: Black, finned aluminum body, stainless steel connector; gold plated beryllium copper contacts.

WEIGHT: 85 g (3 oz)

PHYSICAL DIMENSIONS:

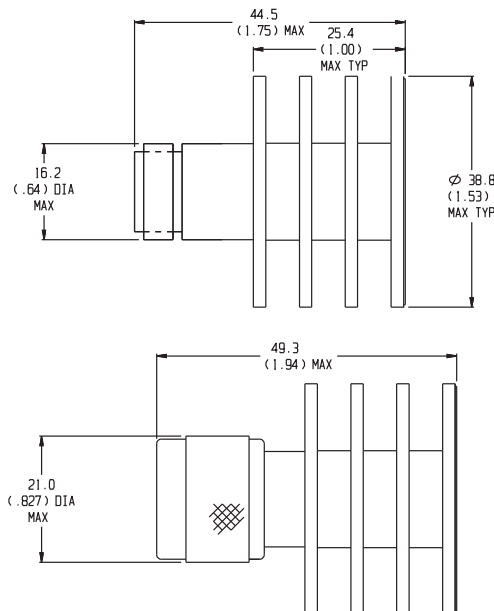

NOTE: All dimensions are given in mm (inches) and are maximum, unless otherwise specified.