



**Model 6500TP1z5G2,
M1 through M5
6500 Watt Pulse Amplifier
1.5GHz–2 GHz**


The Model 6500TP1z5G2 is a self contained, forced air cooled, broadband traveling wave tube (TWT) microwave amplifier designed for pulse applications at low duty factors where instantaneous bandwidth and high gain are required. A reliable TWT provides a conservative 6500 watts minimum peak RF pulse power at the amplifier output connector. Stated power specifications are at the fundamental frequency.

The amplifier's front panel digital display shows forward and reflected average power output or forward and reflected peak power, plus extensive system status information accessed through a series of menus via soft keys. Status indicators include power on, warm-up, standby, operate, faults, excess average or peak reflected power warning and remote. Standard features include a built-in IEEE-488 (GPIB) interface, OdBm input, TTL Gating, VSWR protection, gain control, RF output sample ports, auto sleep, plus monitoring of TWT helix current, cathode voltage, collector voltage, heater current, heater voltage, baseplate temperature and cabinet temperature. Modular design of the power supply and RF components allow for easy access and repair. Use of switching mode power supplies results in significant weight reduction.

Housed in a stylish contemporary cabinet, the amplifier provides readily available pulsed RF power for a variety of applications in Test and Measurement, (including EMC RF pulse susceptibility testing), Industrial and University Research and Development, and Service applications. AR also offers a broad range of amplifiers for CW (Continuous Wave) applications.

See Model Configurations for alternative packaging.

6500TP1z5G2 TYPICAL POWER OUTPUT

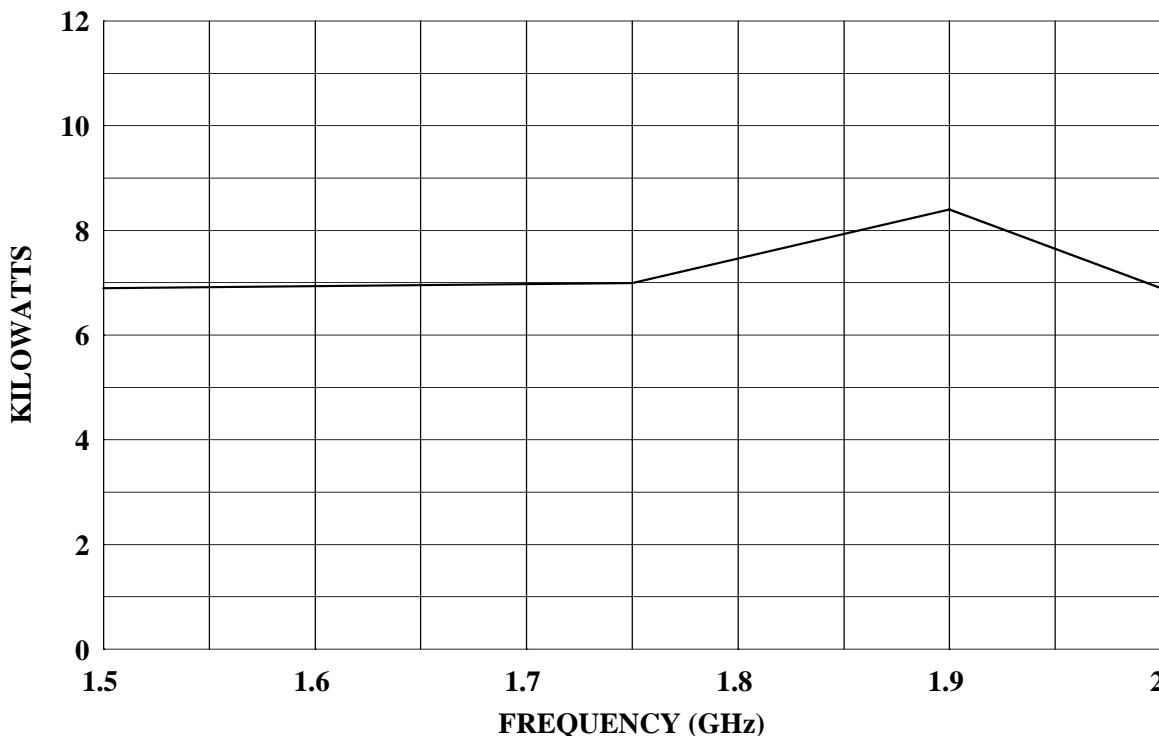

SPECIFICATIONS, MODEL 6500TP1z5G2

POWER (Fundamental), Peak Pulse, @ Output

Nominal 8000 watts
 Minimum 6500 watts

FLATNESS ±6 dB maximum

FREQUENCY RESPONSE 1.5-2 GHz

INPUT FOR RATED OUTPUT 1.0 milliwatt maximum

GAIN (at maximum setting) 68 dB minimum

GAIN ADJUSTMENT (continuous range) 35 dB minimum

INPUT IMPEDANCE 50 ohms, VSWR 2.5:1 maximum

OUTPUT IMPEDANCE 50 ohms, VSWR 2.5:1 typical

MISMATCH TOLERANCE Output VSWR protection using internal isolator. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. May oscillate with unshielded open due to coupling to input. Should not be tested with connector off.

PULSE CAPABILITY

Pulse Width 0.07 – 40 microseconds.

Pulse Rate (PRF) 100 kHz maximum

Duty Cycle 1% maximum.

RF Rise and Fall 30 ns max (10% to 90%).

Delay 300 ns maximum from pulse input to RF 90%

Pulse Width Distortion ±30 ns maximum (50% points of output pulse width compared to 50% points of input pulse width)

Pulse Off Isolation 80 dB minimum, 90 dB typical

Pulse Input TTL level, 50 ohm nominal termination

NOISE POWER DENSITY

(pulse on) Minus 55 dBm/Hz maximum; Minus 65 dBm/Hz typical

(pulse off) Minus 140 dBm/Hz (typical)

HARMONIC DISTORTION Minus 15 dBc maximum

PRIMARY POWER 190-260 VAC, 50/60 Hz single phase, 1 KVA maximum

CONNECTORS

RF input Type N female on rear panel

RF output Type DIN 7-16 on rear panel

RF output forward and reflected sample ports Type N female on rear panel

Pulse input Type BNC female on rear panel

GPIB IEEE-488 female on rear panel

Interlock DB-15 female on rear panel

COOLING Forced air (self contained fans), air entry and exit in rear.

SIZE (W x H x D) 50.3 x 26 x 94 cm, 19.8 x 10.3 x 37 in

WEIGHT (approximate) 57 kg, 125 lbs

MODEL CONFIGURATIONS

E **Package Alternatives.** May select an alternative from the following [E1C or (E1C and E2S) and/or E3H]:

E1C Cabinet: Without outer enclosure for rack mounting, size (W x H x D) 49 x 22 (5U) x 94 cm, 19 x 8.75 (5U) x 37 in., Subtract approximately 11 kg, 25 lbs, for removal of outer enclosure.

E2S Slides: slides installed, add approximately 2 kg, 5 lbs.

E3H Handles: Front pull handles installed.

Model Number	Features E
6500TP1z5G2	Base model
M1	E1C
M2	E3H
M3	E1C & E3H
M4	E1C & E2S
M5	E1C & E2S & E3H

Model number example: Model 6500TP1z5G2 would have option E3H front pull handles installed.