ADAPTERS, BETWEEN-SERIES

7/16 - DIN / Type N , DC - 7.5 GHz

SPECIFICATIONS:

Models: 5704, 5705, 5706, 5707

RoHS Compliant

Electrical:

Frequency Range	DC – 7.5 GHz
VSWR	1.35:1 Max.
Impedance	50 Ohms
Operating Temp. Range	–65°C to +125°C

Mechanical:

Type N Connectors (Mates with MIL–STD–348)	Passivated Stainless Steel
7/16 DIN Connectors (Mates with DIN 47 223)	Silver or White Bronze Plated Brass
Conductors	Silver or White Bronze Plated Beryllium Copper

Model Number: 5707
7/16 – DIN Male / Type N Male

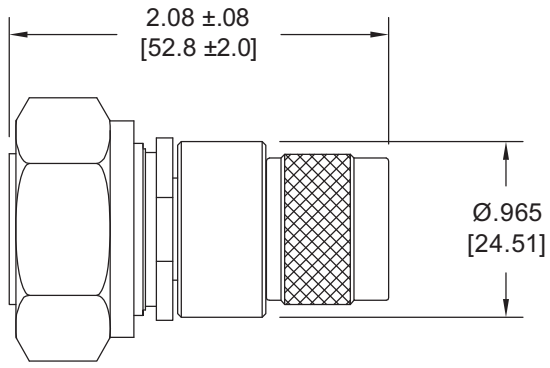

Model Number: 5706
7/16 – DIN Male / Type N Female

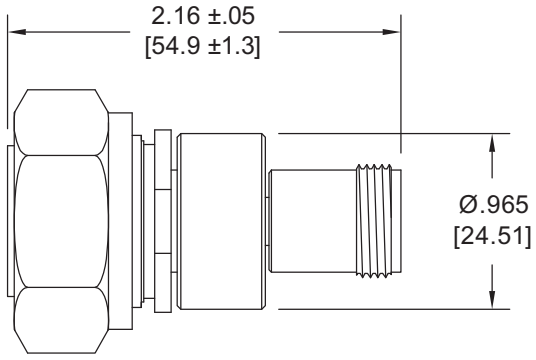

Model Number: 5705
7/16 DIN Female / Type N Male

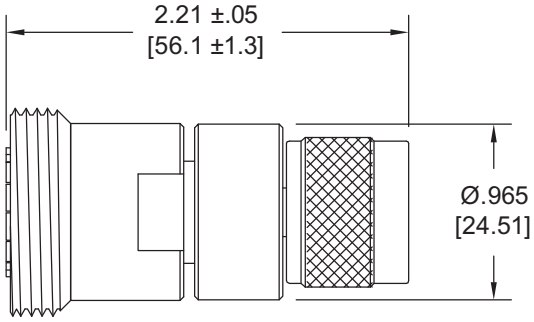

Model Number: 5704
7/16 DIN Female / Type N Female

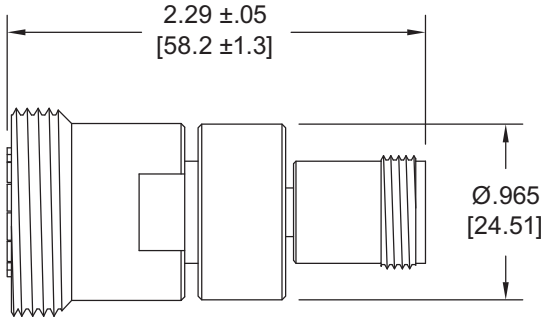

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.

5707: REV F

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex.com/inmet • inmetsales@aeroflex-.com